


CLASSIC




RADICI TILES

TORINO

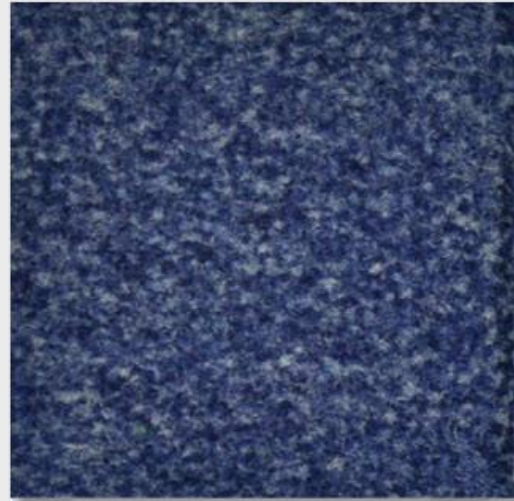


1682

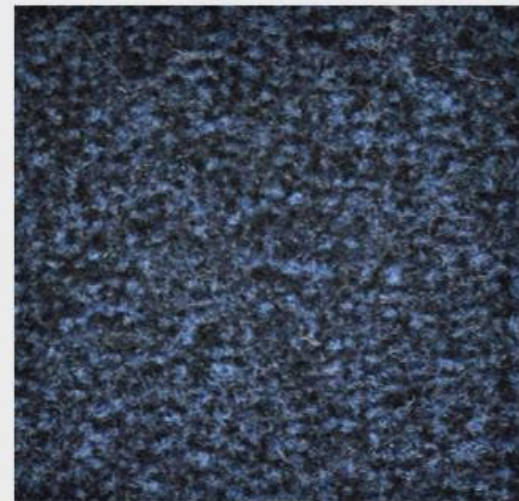


1680




1676

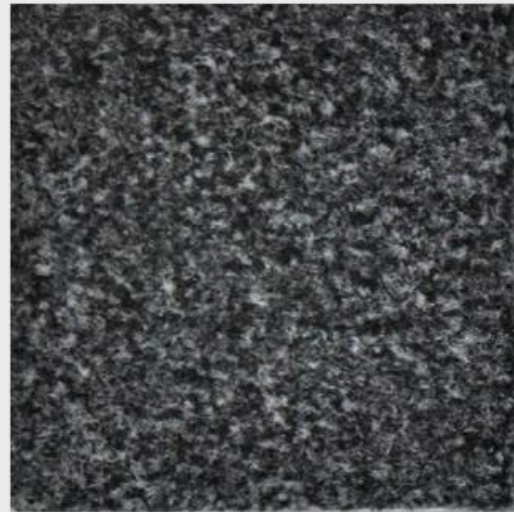

1678

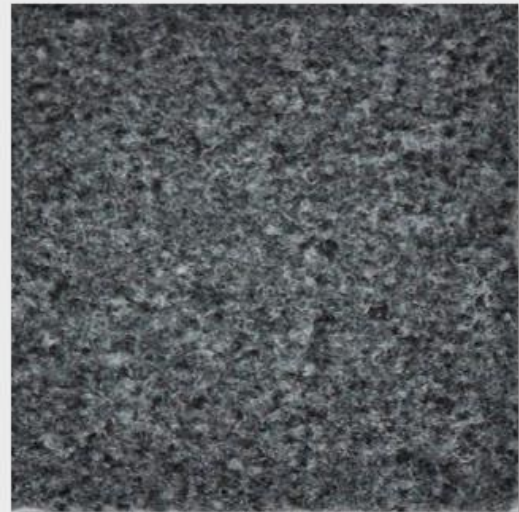

1677

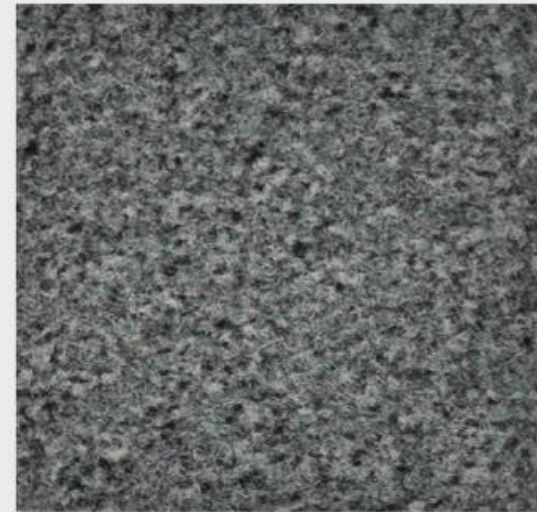

1674

PARMA



1870



18289




1893



1875





1876

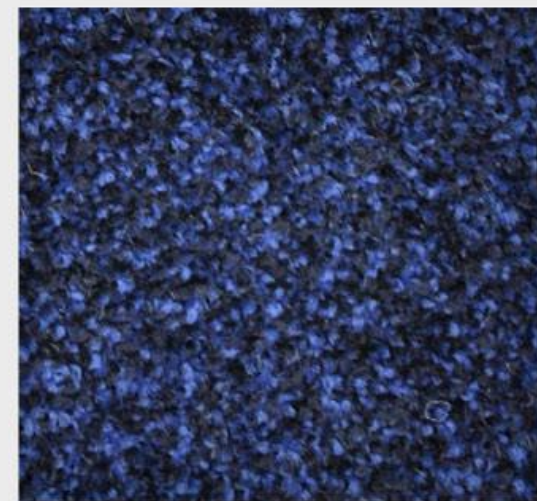


18410

BOLOGNA

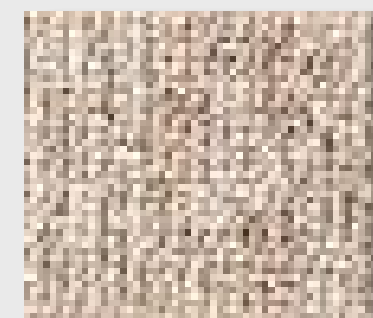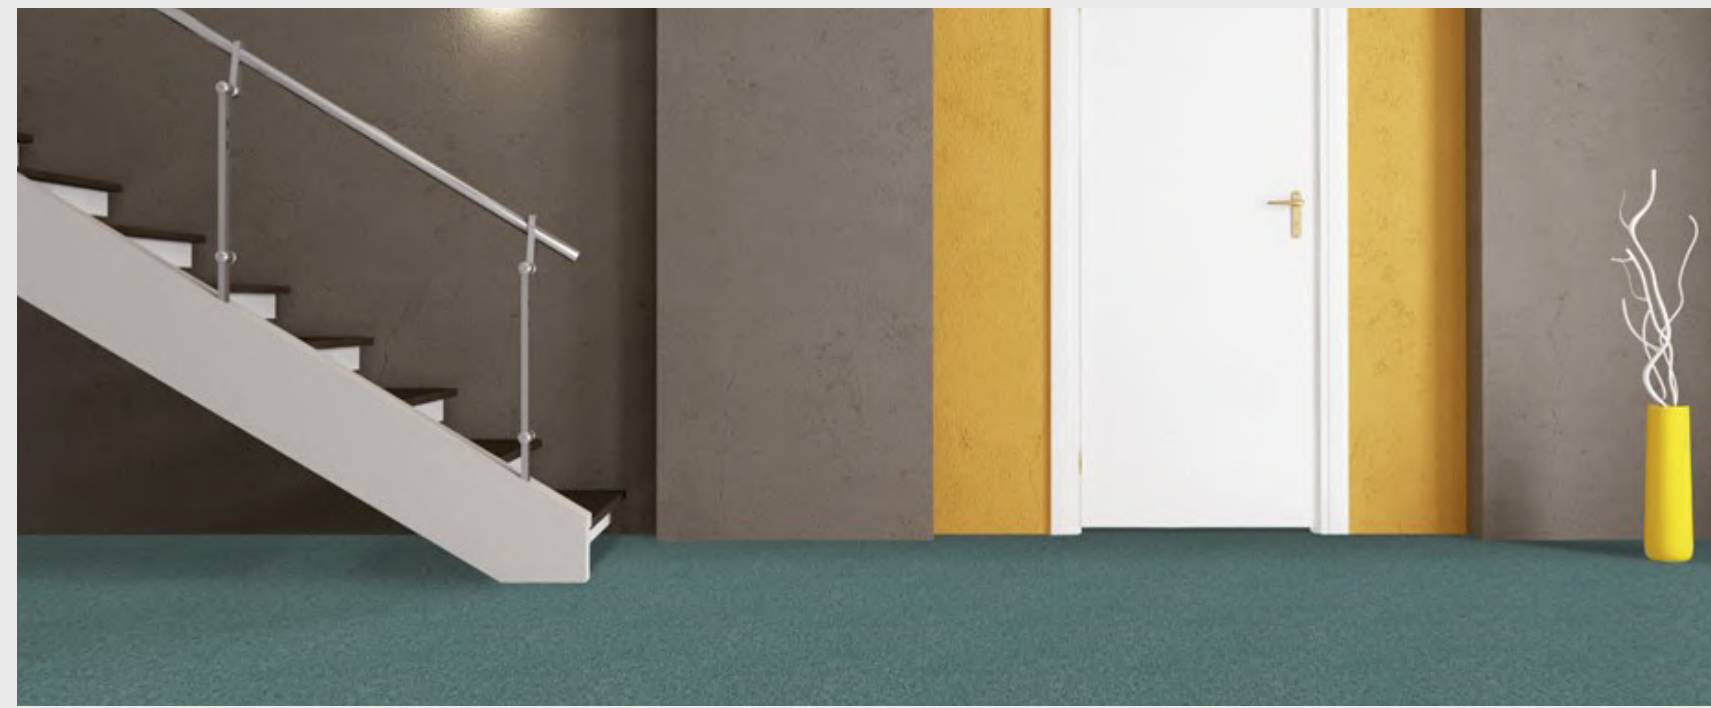

222570

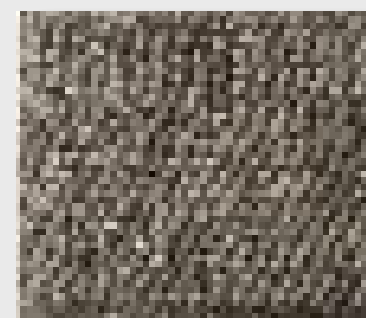

222594



222593



222520




222541




222582




222583

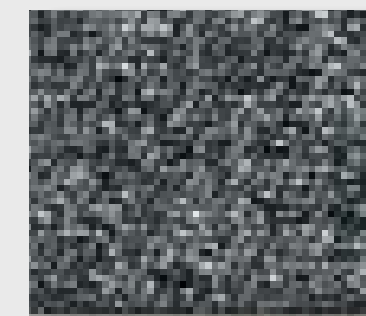


222575

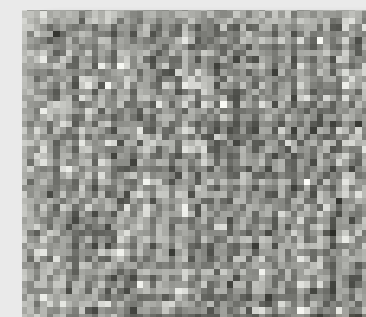


222574

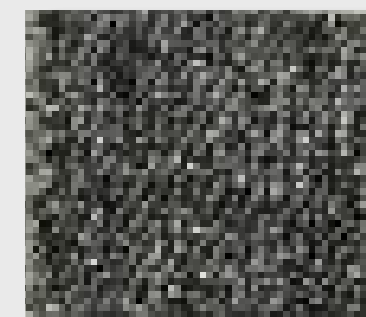


222576

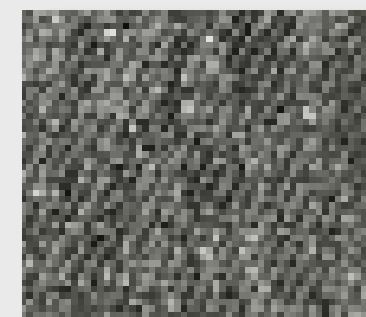

222573

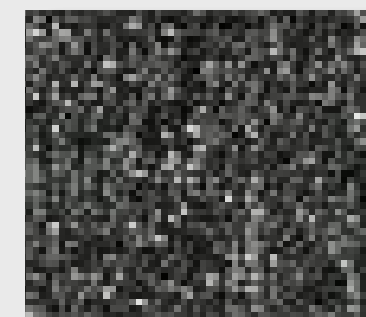


222577

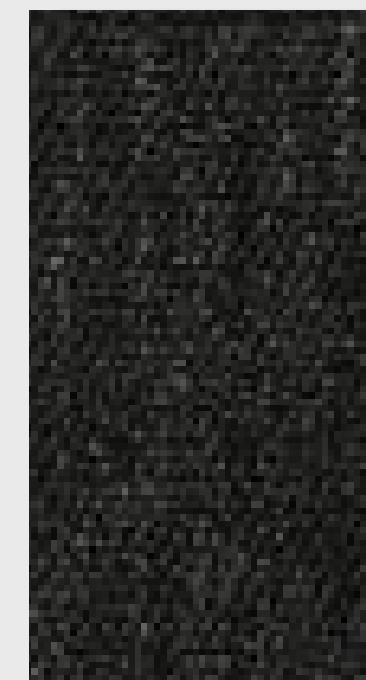


222578


BOLOGNA
LINEA

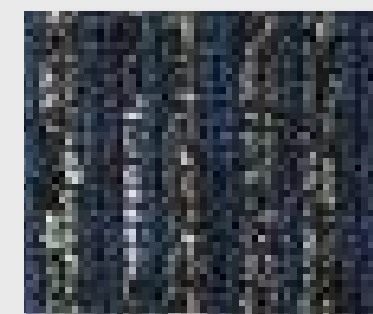


2228377

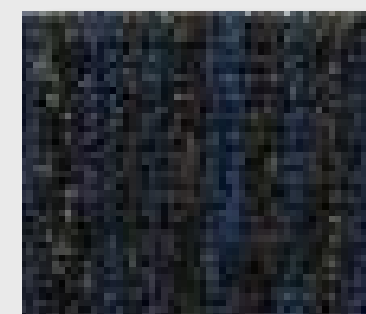

2227883

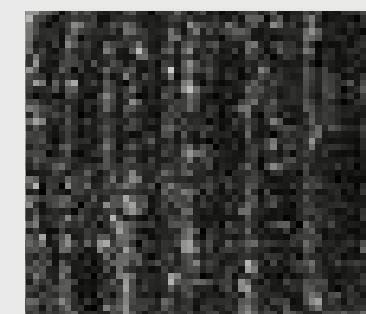


2227877

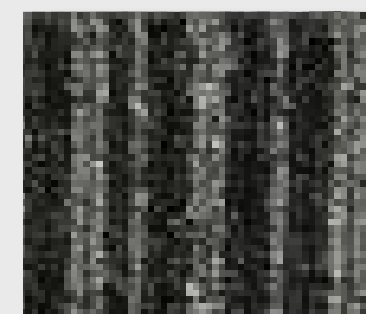

2227873




166542

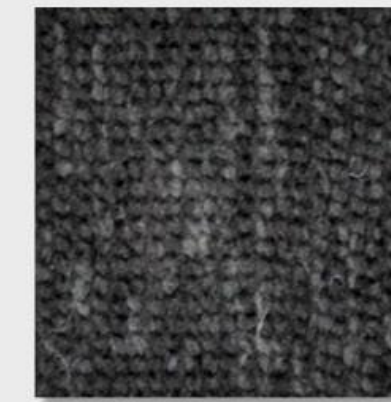


166551



166550

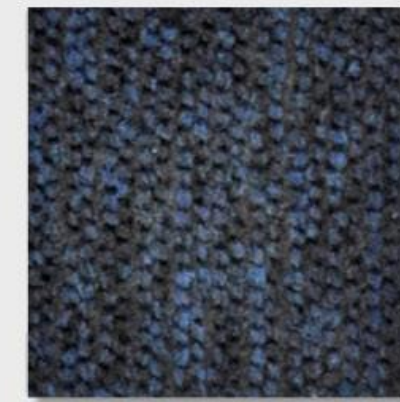

166560

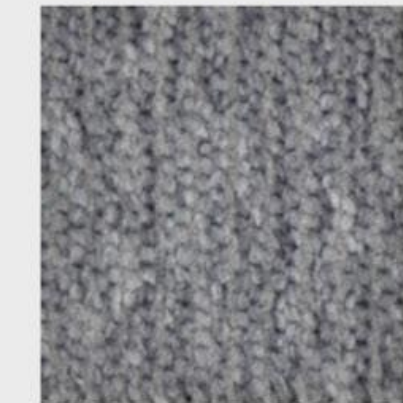

166540



166580




166570



166531

FIRENZE

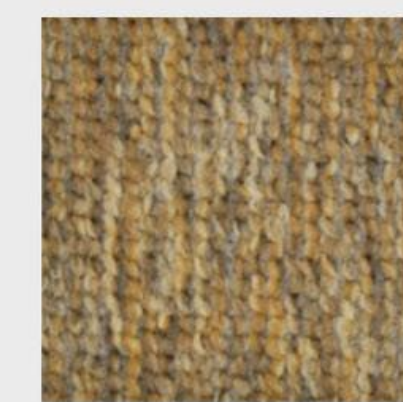

166520




166509


FIRENZE LINEA



166661

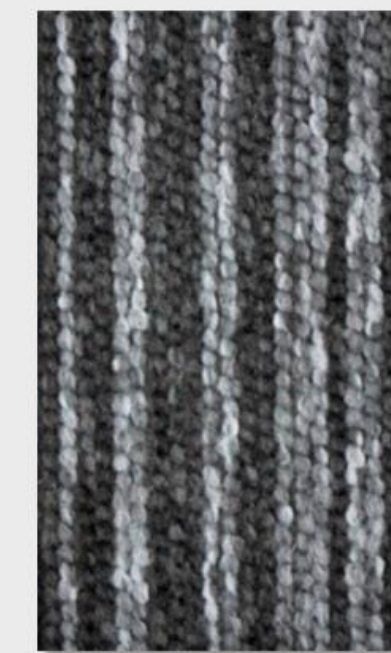

166640

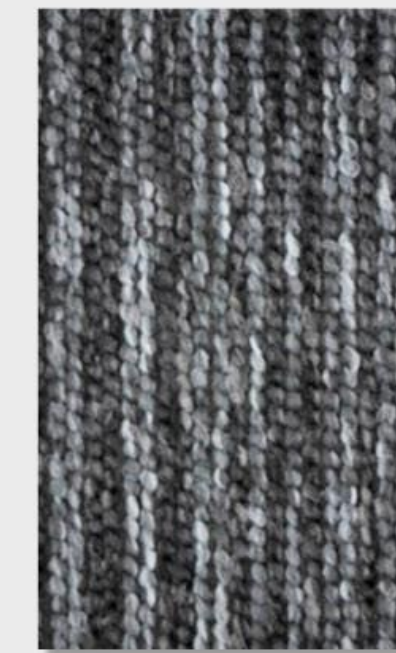

166645



166650

ROMA



ATHENS



VENEZIA



POLYFLEX BACKING



FELT BACKING



PARMA

SPECIFICATION			
Quality		: PARMA	
Product definition		: tufted cut pile, frisee	
Gauge		: 1/10"	
No. of tufts	ISO 1763	: ± 178000/m²	
Pile fibre		: 100% polyamide nylon ECONYL	
Pile weight	ISO 8543	: 1100 gr/m² ± 5%	
Pile height	ISO 1766	: 5.5 mm ± 5%	
Primary backing		: PA/PES non-woven - Colback	
Tile backing		: Polyflex	
Total thickness	ISO 1765	: 8.5 mm ± 5%	
Total weight	ISO 8543	: 4800 gr/m² ± 7,5%	
Tile size		: 50 x 50 cm (± 19.7" x 19.7")	
Tiles per box		: 20	
PERFORMANCE			
Use classification	EN 1307	: Class 33	
Castor chair test	EN 985	: A. continuous use	
Abrasion	ISO 12951	: pass	
Vettermann test	ISO TR 10361/EN 1471	: pass	
Thermal isolation	ISO 8302	: 0.07 m² K/W	
Dimensional stability	EN 986 - EN 1307	: pass	
Luxury/Comfort	EN 1307	: classe 5	
Sound Absorption	ISO 140-8	: 24dB	
ELECTROSTATIC PROPERTIES			
Walk on test	ISO 6356	: -2.0 kV	
Horizontal electrical resistance	ISO 10965	: 7.9x10 ¹² Ω	
Vertical electrical resistance	ISO 10965	: 4.8x10 ¹¹ Ω	
Static loading		: anti-static	
FLAME PROPERTIES			
Reaction to fire	EN ISO 11925-2 EN ISO 9239-1	: Bfl – s1	
Hot metal nut test	BS 4790	: Low Radius	
COLOUR FASTNESS PROPERTIES			
Light	ISO 105 B02	: 4-5	
Rubbing, dry	ISO 105 X12	: 5.0	
Rubbing, wet	ISO 105 X12	: 5.0	
Water	ISO 105 E01	: 4-5	
Water stains	EN 1307/EN 15115	: 5.0	
GENERAL			
Recommended maintenance:	Best results are obtained when cleaned with a dry shampoo method. Directional arrows are printed on the back of each tile. Best results are obtained when laid checkerboard.		
Pile direction:	Tiles require no underlay, nailing, gluing or sewing and may be laid loose on a flat, dry, non-slippery floor. When tiles are laid on parquet, vinyl or in open areas larger than 30 m² it is advisable to use double sided adhesive tape on every 8th row or a tackifier.		
Laying instructions:			


EN 14041






Specification in according to EN 1307

TORINO

SPECIFICATION			
Quality		: TORINO	
Product definition		: tufted velour's cut pile	
Gauge		: 1/10"	
No. of tufts	ISO 1763	: ± 217000/m ² (± 151320/yd ²)	
Pile fibre		: 100% polyamide – Solution dyed	
Pile weight	ISO 8543	: 640 gr/m ² ± 5% (± 22 oz/yd ²)	
Pile height	ISO 1766	: 2 mm ± 5%	
Primary backing		: PA/PES non-woven - Colback	
Tile backing		: Polyflex with glass fibre scrim	
Total thickness	ISO 1765	: 6.2 mm ± 5%	
Total weight	ISO 8543	: 4297 gr/m ² ± 7.5% (± 136 oz/yd ²)	
Tile size		: 50 x 50 cm (± 19.7" x 19.7")	
Tiles per box		: 20	
PERFORMANCE			
Use classification		: 33	
Castor chair test	EN 985	: B, occasional use	
Abrasion	EN 12951	: pass	
Vettermann test	ISO 10361/EN 1471	: pass	
Thermal isolation	ISO 8302	: 0.10 m ² K/W	
Dimensional stability	EN 986	: pass	
Luxury/Comfort	EN 1307	: classe 3	
Sound Absorption	ISO 140-8	: 24 dB	
ELECTROSTATIC PROPERTIES			
Walk on test	ISO 6356	: -0.1 kV	
Horizontal electrical resistance	ISO CD 10965	: 4x10 ⁷ Ω	
Vertical electrical resistance	ISO CD 10965	: 4x10 ⁷ Ω	
Static loading		: anti-static	
FLAME PROPERTIES			
Reaction to fire	EN ISO 11925-2 EN ISO 9239-1	: Bfl – s1	
Hot metal nut test	BS 4790	: Low Radius	
COLOUR FASTNESS PROPERTIES			
Light	ISO 105 B02	: > 5	
Rubbing, dry	ISO 105 X12	: 4-5	
Rubbing, wet	ISO 105 X12	: 4-5	
Water	ISO 105 E01	: 4-5	
Shampoo	BS 1006	: 5.0	
Water stains	EN 1307/G	: 4-5	
GENERAL			
Recommended maintenance:	Best results are obtained when cleaned with a dry shampoo method. Directional arrows are printed on the back of each tile.		
Pile direction:	Best results are obtained when laid checkerboard.		
Laying instructions:	Tiles require no underlay, nailing, gluing or sewing and may be laid loose on a flat, dry, non-slippery floor. When tiles are laid on parquet, vinyl or in open areas larger than 30 m ² it is advisable to use double sided adhesive tape on every 8th row or a tackifier.		



EN 10401





Specified in accordance ISO 1397

ROMA

SPECIFICATION			
Quality		: ROMA	
Product definition		: tufted loop pile	
Gauge		: 1/8"	
No. of tufts	ISO 1763	: ± 117000/m2	
Pile fibre		: 100% polyamide SDN	
Pile weight	ISO 8543	: 520 gr/m2 ± 5%	
Pile height	ISO1766	: 3.5 mm ± 5%	
Primary backing		: PA/PES non-woven - Colback	
Tile backing		: Polyflex with a non-woven fabric	
Total thickness	ISO 1765	: 7.2 mm ± 7,5%	
Total weight	ISO 8543	: 4200 gr/m2 ± 7,5%	
Tile size		: 50 x 50 cm (± 19.7" x 19.7")	
Tiles per box		: 20	
PERFORMANCE			
Use classification		: Class 33	
Castor chair test	EN 985	: A. continues use	
Abrasion	ISO 12951	: pass	
Vettermann test	ISO TR 10361/EN 1471	: pass	
Thermal isolation	ISO 8302	: 0.09 m2 K/W	
Dimensional stability	ISO 2551	: pass	
Luxury/Comfort	EN 1307	: classe 1	
Sound Absorption	ISO 140-8	: 23 dB	
ELECTROSTATIC PROPERTIES			
Walk on test	ISO 6356	: -0.1 kV	
Horizontal electrical resistance	ISO CD 10965	: 8x10 ⁹ Ω	
Vertical electrical resistance	ISO CD 10965	: 4x10 ⁹ Ω	
Static loading		: anti-static	
FLAME PROPERTIES			
Reaction to fire	EN ISO 11925-2 EN ISO 9239-1	: Bfl – s1	
Hot metal nut test	BS 4790	: Low Radius	
COLOUR FASTNESS PROPERTIES			
Light	ISO 105 B02	: > 5.0	
Rubbing, dry	ISO 105 X12	: 4.5	
Rubbing, wet	ISO 105 X12	: 5.0	
Shampoo	BS 1006	: 4.5	
Water	ISO 105 E01	: 5.0	
Water stains	TNO W 6024	: 5.0	
GENERAL			
Recommended maintenance:	Best results are obtained when cleaned with a dry shampoo method.		
Pile direction:	Directional arrows are printed on the back of each tile. Best results are obtained when laid checkerboard.		
Laying instructions:	Tiles require no underlay, nailing, gluing or sewing and may be laid loose on a flat, dry, non-slippery floor. When tiles are laid on parquet, vinyl or in open areas larger than 30 m2 it is advisable to use double sided adhesive tape on every 8th row or a tackifier.		



EN 14041



Specification in according EN 1307

ATHENS

SPECIFICATION			
Quality		: ATHENS	
Product definition		: tufted loop pile	
Gauge	ISO 2424	: 1/10"	
No. of tufts	ISO 1763	: 173.360 /m² (- 7,5%. + 10%)	
Pile fibre	ISO 2424	: 100% PA SDN	
Pile weight	ISO 8543	: 510 gr/m² (± 5%)	
Pile height	ISO 1765	: 3.5 mm (± 5%)	
Primary backing	ISO 2424	: PA/PES non-woven - Colback	
Tile backing	ISO 2424	: Polyflex	
Total thickness	ISO 1765	: 5.2 mm (± 5%)	
Total weight	ISO 8543	: 3800 gr/m² (± 7,5%)	
Tile size	EN 986	: 50 x 50 cm (± 0.2 %)	
Tiles per box		: 20	
PERFORMANCE			
Use classification	EN 1307	: 33	
Castor chair test	EN 985	: A. continuous use	
Thermal isolation	ISO 8302	: Ca. 0,07 m² K/W	
Luxury/Comfort	EN 1307	: LC1	
Sound Insulation	ISO 10140	: Ca. 25 dB	
ELECTROSTATIC PROPERTIES			
Walk on test	ISO 6356	: -0.1 kV	
Horizontal electrical resistance	ISO CD 10965	: 3x10 ⁹ Ω	
Vertical electrical resistance	ISO CD 10965	: 4x10 ¹⁰ Ω	
Static loading		: anti-static	
FLAME PROPERTIES			
Reaction to fire	EN 13501-1	: B ₁ – s1	
COLOUR FASTNESS PROPERTIES			
Light	ISO 105 B02	: > 5	
Rubbing, dry	ISO 105 X12	: 5.0	
Rubbing, wet	ISO 105 X12	: 5.0	
Shampoo	BS 1006	: 5.0	
Water	ISO 105 E01	: 4.5	
Water stains	TNO W 6024	: 5.0	
GENERAL			
Recommended maintenance:	Best results are obtained when cleaned with a dry shampoo method.		
Pile direction:	Directional arrows are printed on the back of each tile. Best results are obtained when laid checkerboard.		
Laying instructions:	Tiles require no underlay, nailing, gluing or sewing and may be laid loose on a flat, dry, non-slippery floor. When tiles are laid on parquet, vinyl or in open areas larger than 30 m² it is advisable to use double sided adhesive tape on every 8th row or a tackifier.		

BOLOGNA / BOLOGNA LINEA

SPECIFICATION		: BOLOGNA – BOLOGNA LINEA	
Quality		: tufted loop pile	
Product definition		: 1/10"	
Gauge		: ± 189600/m²	
No. of tufts	ISO 1763	: 100% Solution Dyed Polyammide	
Pile fibre		: 540 gr/m² ± 5%	
Pile weight		: 3.00 mm ± 5%	
Pile height	ISO 1766	: PA/PES non-woven - Colback	
Primary backing		: Polyflex	
Tile backing		: 5.40 mm ± 5%	
Total thickness	ISO 1765	: 4100 gr/m² ± 7,5%	
Total weight		: 50 x 50 cm (± 19.7" x 19.7")	
Tile size		: 20	
Tiles per box			
PERFORMANCE			
Use classification	method en 1307	: 33	
Castor chair test	EN 985	: A. continuous use	
Abrasion	EN 1963	: pass	
Vettermann test	ISO 10361/EN 1471	: pass	
Thermal isolation	ISO 8302	: 0.08 m² K/W	
Dimensional stability	EN 986	: pass	
Luxury/Comfort	EN 1307	: classe 1	
Sound Absorbaton	ISO 140-8	: 24 dB	
ELECTROSTATIC PROPERTIES			
Walk on test	ISO 6356	: -0.1 kV	
Horizontal electrical resistance	ISO CD 10965	: 3x10 ⁹ Ω	
Vertical electrical resistance	ISO CD 10965	: 4x10 ¹⁰ Ω	
Static loading		: anti-static	
FLAME PROPERTIES			
Reaction to fire	EN ISO 11925-2	: B ₁ – s1	
	EN ISO 9239-1	: Low Radius	
Hot metal nut test	BS 4790		
COLOUR FASTNESS PROPERTIES			
Light	ISO 105 B02	: > 5	
Rubbing, dry	ISO 105 X12	: 5.0	
Rubbing, wet	ISO 105 X12	: 5.0	
Shampoo	BS 1006	: 5.0	
Water	ISO 105 E01	: 4.5	
Water stains	TNO W 6024	: 5.0	
GENERAL			
Recommended maintenance:	Best results are obtained when cleaned with a dry shampoo method.		
Pile direction:	Directional arrows are printed on the back of each tile. Best results are obtained when laid checkerboard.		
Laying instructions:	Tiles require no underlay, nailing, gluing or sewing and may be laid loose on a flat, dry, non-slippery floor. When tiles are laid on parquet, vinyl or in open areas larger than 30 m² it is advisable to use double sided adhesive tape on every 8th row or a tackifier.		


EN 16041









Specification in according EN 1397

NAPOLI / NAPOLI LINEA

SPECIFICATION		
Quality		: NAPOLI – NAPOLI LINEA
Product definition		: tufted loop pile
Gauge		: 1/10"
No. of tufts	ISO 1763	: ± 187000/m²
Pile fibre		: 100% Solution Dyed Polyammide
Pile weight		: 550 gr/m² ± 5%
Pile height	ISO 1766	: 3.50 mm ± 5%
Primary backing		: PA/PES non-woven - Colback
Tile backing		: Polyflex
Total thickness	ISO 1765	: 5.40 mm ± 5%
Total weight		: 4100 gr/m² ± 7,5%
Tile size		: 50 x 50 cm (± 19.7" x 19.7")
Tiles per box		: 20
PERFORMANCE		
Use classification	method en 1307	: 33
Castor chair test	EN 985	: A. continuous use
Abrasion	EN 1963	: pass
Vettermann test	ISO 10361/EN 1471	: pass
Thermal isolation	ISO 8302	: 0.08 m² K/W
Dimensional stability	EN 986	: pass
ELECTROSTATIC PROPERTIES		
Walk on test	ISO 6356	: -0.1 kV
Horizontal electrical resistance	ISO CD 10965	: 3x10 ¹⁰ Ω
Vertical electrical resistance	ISO CD 10965	: 4x10 ¹⁰ Ω
Static loading		: anti-static
FLAME PROPERTIES		
Reaction to fire	EN ISO 11925-2	
	EN ISO 9239-1	: B ₁ – s1
Hot metal nut test	BS 4790	: Low Radius
COLOUR FASTNESS PROPERTIES		
Light	ISO 105 B02	: > 5
Rubbing, dry	ISO 105 X12	: > 5
Rubbing, wet	ISO 105 X12	: 5.0
Shampoo	BS 1006	: 5.0
Water	ISO 105 E01	: 4.5
Water stains	TNO W 6024	: 5.0
GENERAL		
Recommended maintenance:	Best results are obtained when cleaned with a dry shampoo method.	
Pile direction:	Directional arrows are printed on the back of each tile. Best results are obtained when laid checkerboard.	
Laying instructions:	Tiles require no underlay, nailing, gluing or sewing and may be laid loose or on a flat, dry, non-slippery floor. When tiles are laid on parquet, vinyl or on open areas larger than 30 m² it is advisable to use double sided adhesive tape on every 8th row or a tackifier.	

The page features several thin, light gray curved lines that sweep across the background, creating a sense of movement and design. One large curve starts from the top left and arcs towards the bottom right. Another smaller curve is visible in the top right corner.

RADICI PIETRO
INDUSTRIES & BRANDS S.p.A.

Via Cav. Pietro Radici, 19
24026 Cazzano S. Andrea (BG) - Italy
Tel. +39 035 724242 - Fax +39 035 741549
info.sit-in@radici.it - www.sit-in.it