

RADICI


Living

Collection


Ferrara




2464010 2464020 2464031 2464032

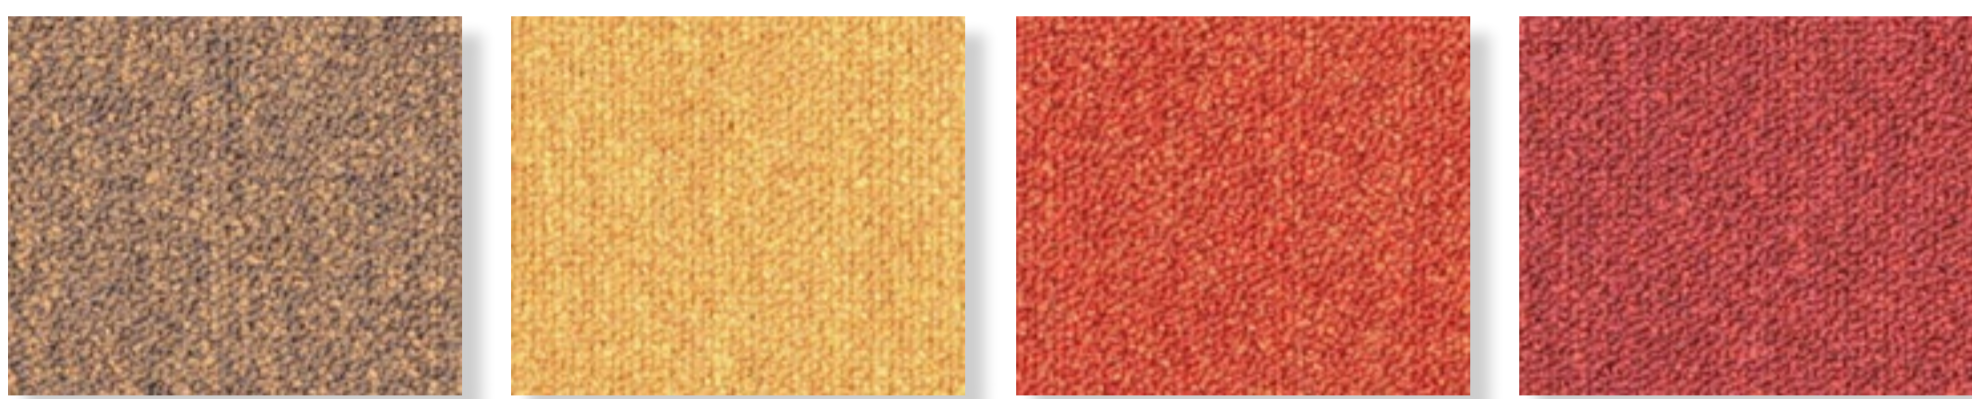


2464033 2464049 2464038 2464080

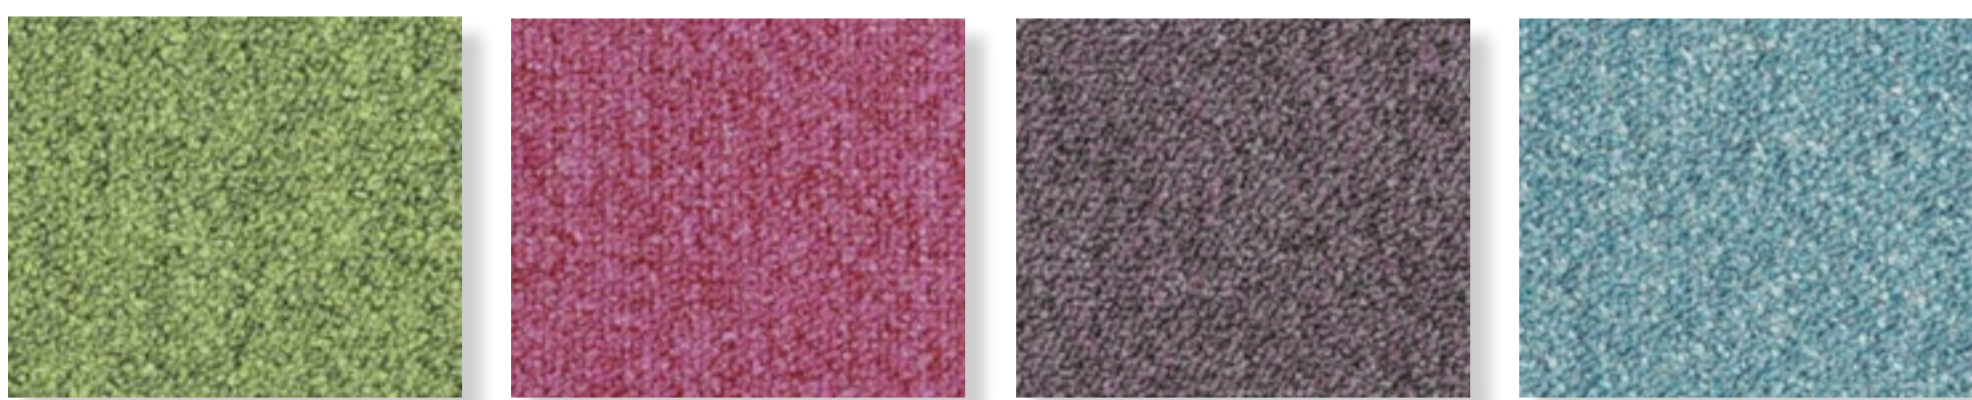

2464073 2464083 2464096 2464063

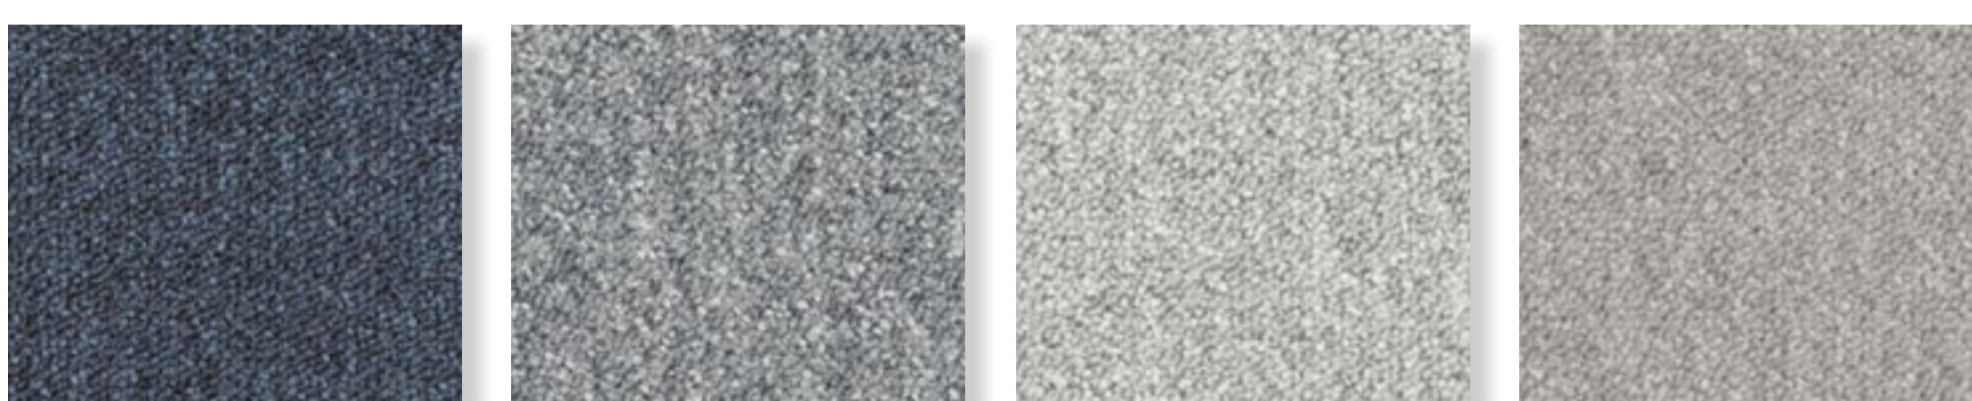

2464060 2464061 2464040 2464041

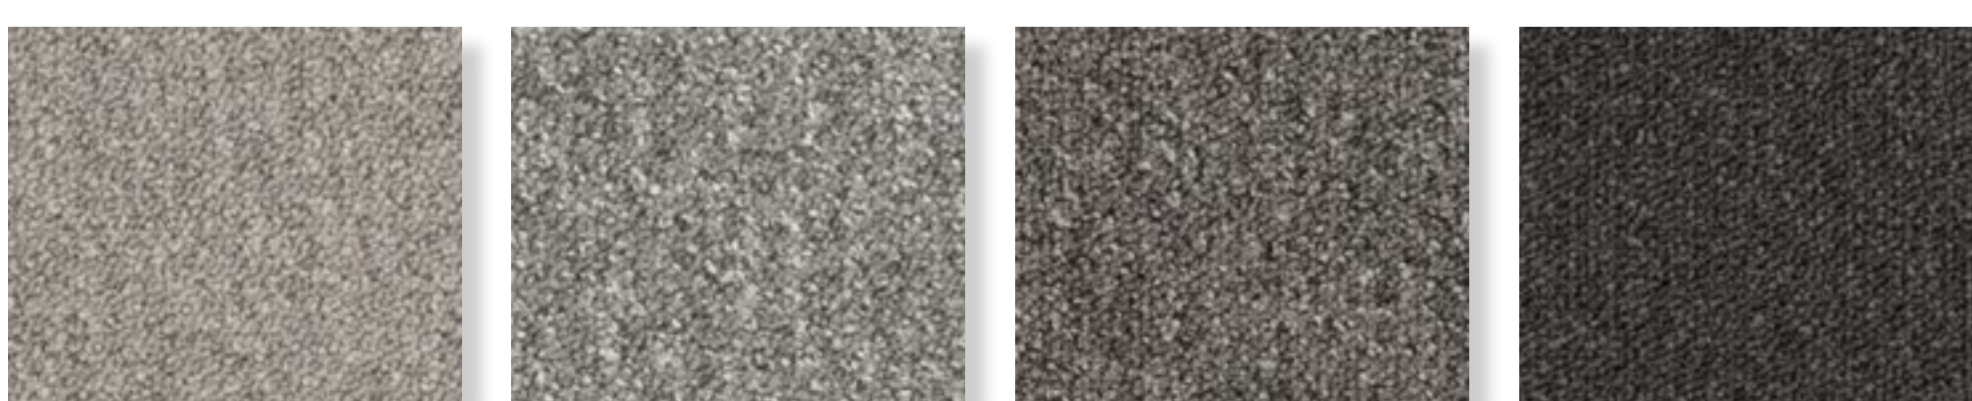

2464044 2464042 2464050 2464055

Athens



242772 222777 222776




242784 222783




242793 2227278 222778

Napoli / Napoli Linea

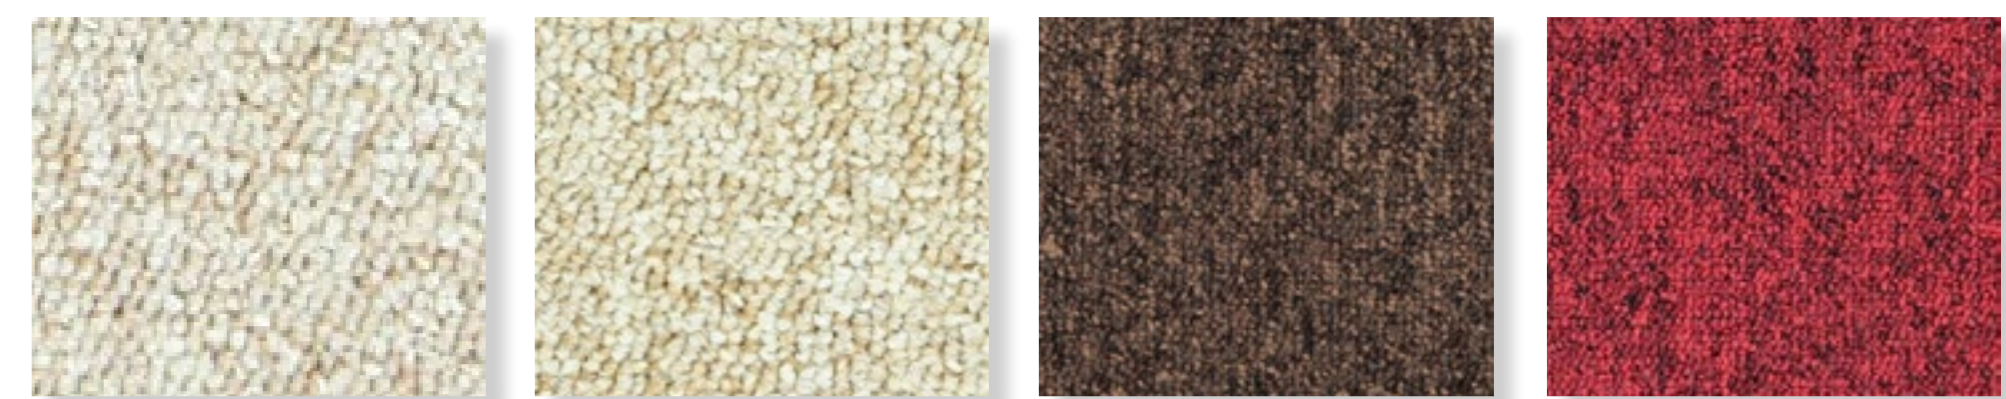

224470 224472 224493 224420

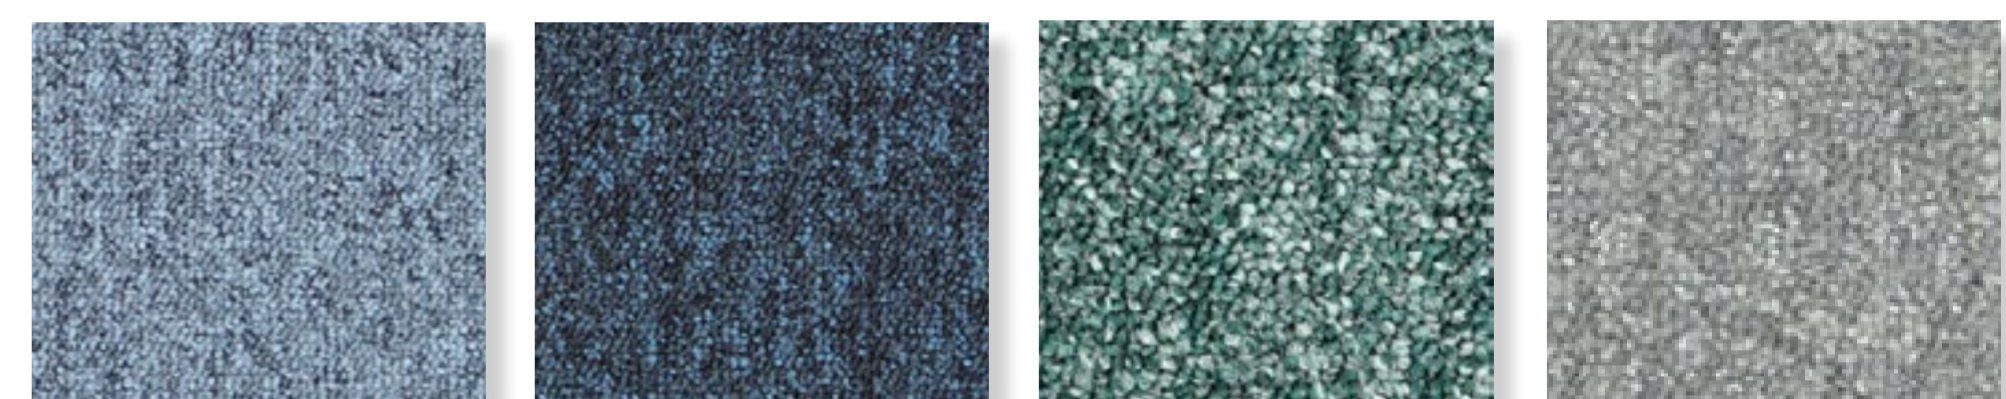

224482 224483 224441 224475



224476 224477 224478 224175



224575 224183 224583 224578



224520 224120 224577 224178


Parma



1870



24115

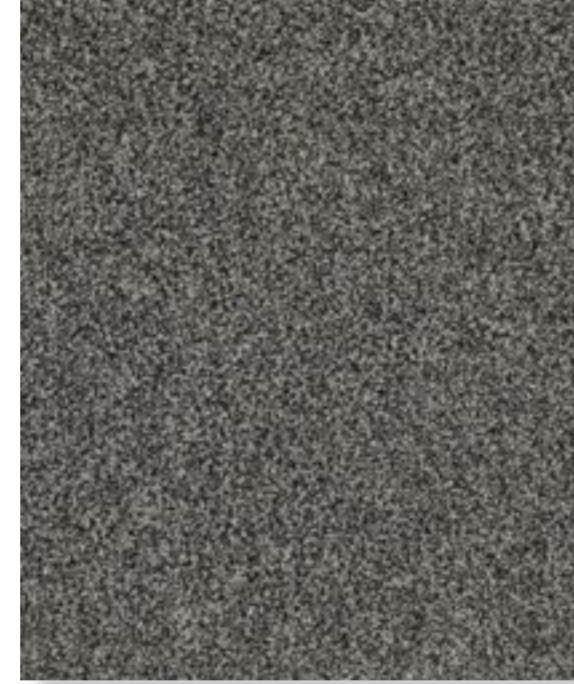


2474




1893




18289

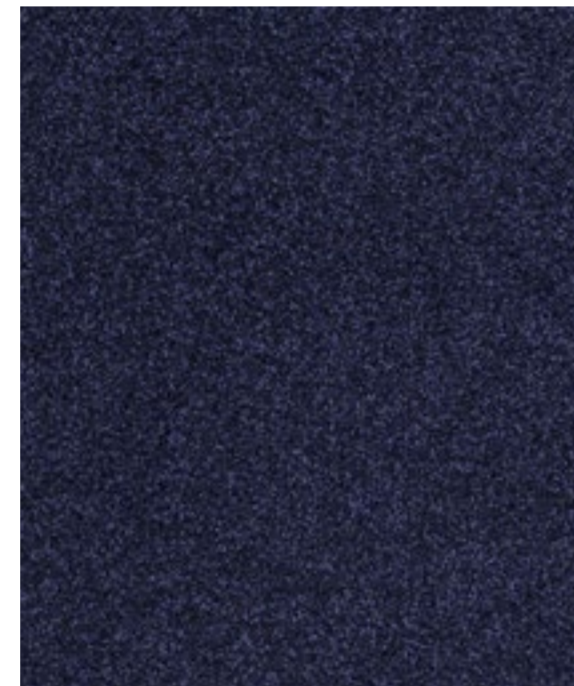

18410

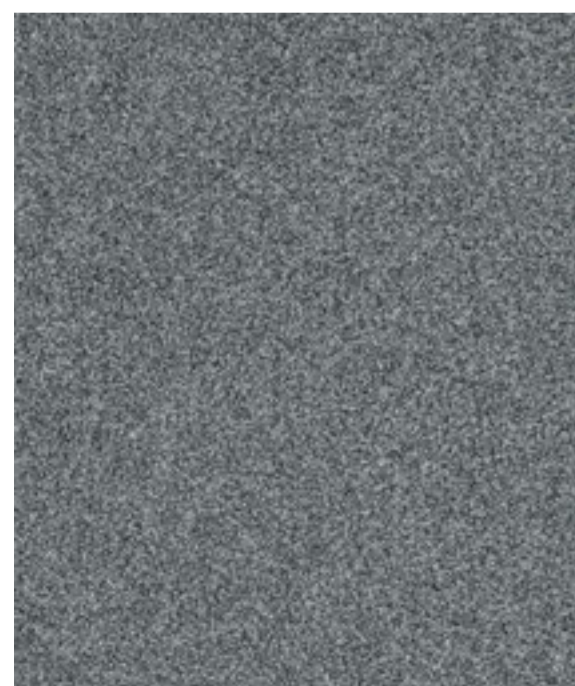

1875

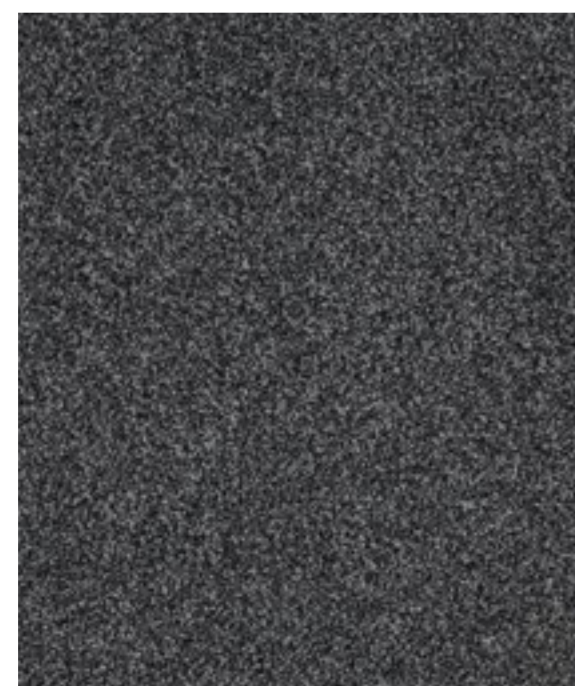

1876



2477


Bologna



222570




222594

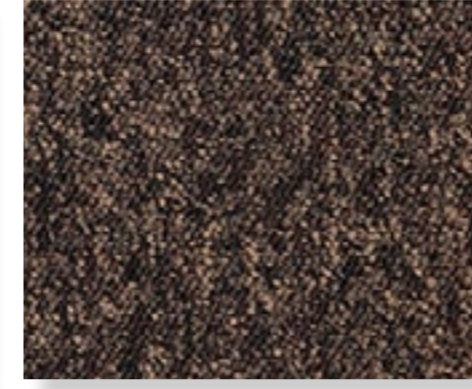

222593



222520

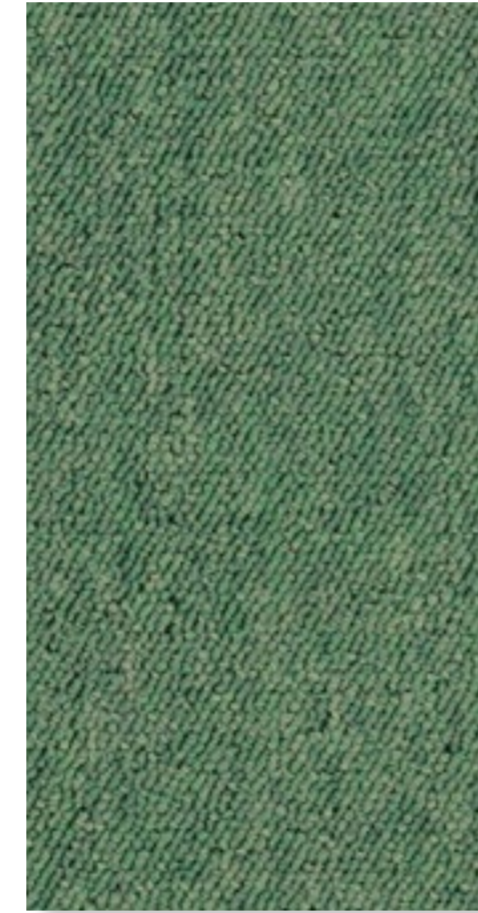

222541




222582




222583



222575

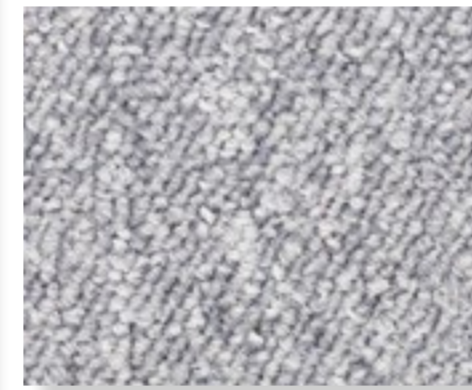


222574

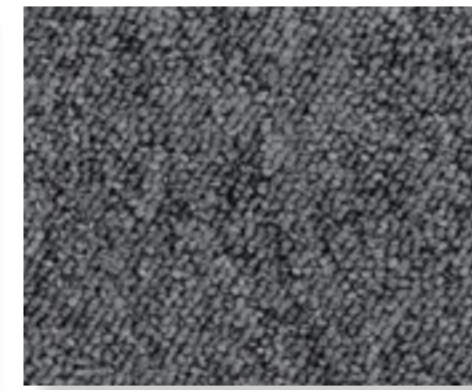

222576



222573

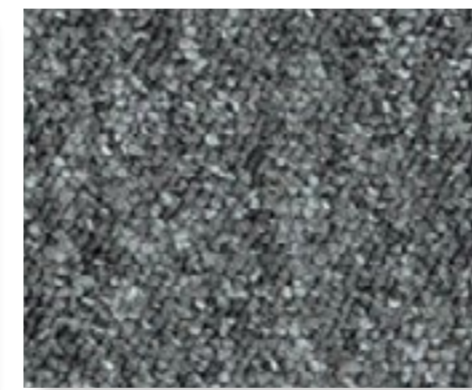

222577



222578

Bologna Linea




2228377



2227883



2227877

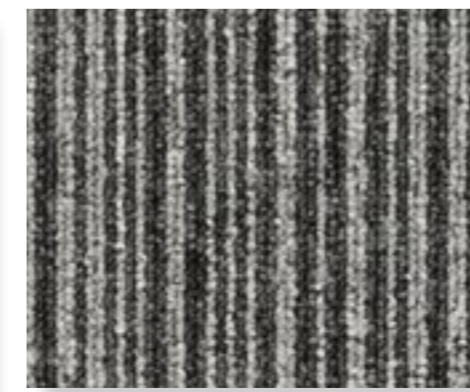

2227873

Assisi



244647



244555



244556



244575



244547



244573



244677



244578

Parma



CONSTRUCTION
Tufted Cut Pile- Frisée 1/10”

COMPOSITION
100% Polyamide ECONYL

SECONDARY BACKING
POLYFLEX

STITCHES PER M²
± 178000

PILE HEIGHT ± 5.5 mm

TOTAL HEIGHT ± 6.2 mm

YARN WEIGHT ± 1100 g/m²

TOTAL WEIGHT ± 4800 g/m²

TILE SIZE 50x50 cm



COLOUR FASTNESS TO LIGHT 4-5
INSULATION IMPACT NOISE ΔL_w 25 db
THERMAL RESISTANCE m² K/W ≤ 0,17
BODY VOLTAGE WALKING TEST K/W ≤ 2

Bologna + Linea



CONSTRUCTION
Tufted Loop Pile 1/10”

COMPOSITION
100% Polyamide SD

SECONDARY BACKING
POLYFLEX

STITCHES PER M²
± 189600

PILE HEIGHT ± 3.0 mm

TOTAL HEIGHT ± 5.4 mm

YARN WEIGHT ± 540 g/m²

TOTAL WEIGHT ± 4100 g/m²

TILE SIZE 50x50 cm



COLOUR FASTNESS TO LIGHT 5
INSULATION IMPACT NOISE ΔL_w 24 db
THERMAL RESISTANCE m² K/W ≤ 0,17
BODY VOLTAGE WALKING TEST K/W ≤ 2

Ferrara



CONSTRUCTION
Tufted Loop Pile 1/10”

COMPOSITION
100% Polyamide SD

SECONDARY BACKING
POLYFLEX

STITCHES PER M²
± 164000

PILE HEIGHT ± 2.6 mm

TOTAL HEIGHT ± 5.4 mm

YARN WEIGHT ± 550 g/m²

TOTAL WEIGHT ± 4100 g/m²

TILE SIZE 50x50 cm



COLOUR FASTNESS TO LIGHT 5
INSULATION IMPACT NOISE ΔL_w 23 db
THERMAL RESISTANCE m² K/W ≤ 0,17
BODY VOLTAGE WALKING TEST K/W ≤ 2

Napoli + Linea



CONSTRUCTION
Tufted Loop Pile 1/10”

COMPOSITION
100% Polyamide SD

SECONDARY BACKING
POLYFLEX

STITCHES PER M²
± 187000

PILE HEIGHT ± 3.5 mm

TOTAL HEIGHT ± 5.4 mm

YARN WEIGHT ± 550 g/m²

TOTAL WEIGHT ± 4100 g/m²

TILE SIZE 50x50 cm



COLOUR FASTNESS TO LIGHT 5
INSULATION IMPACT NOISE ΔL_w 24 db
THERMAL RESISTANCE m² K/W ≤ 0,17
BODY VOLTAGE WALKING TEST K/W ≤ 2

Assisi



CONSTRUCTION
Tufted Loop Pile -Scroll 1/10”

COMPOSITION
100% Polyamide SD

SECONDARY BACKING
POLYFLEX

STITCHES PER M²
± 177750

PILE HEIGHT ± 2.2 mm

TOTAL HEIGHT ± 5.5 mm

YARN WEIGHT ± 550 g/m²

TOTAL WEIGHT ± 3900 g/m²

TILE SIZE 50x50 cm



COLOUR FASTNESS TO LIGHT 5
INSULATION IMPACT NOISE ΔL_w 20 db
THERMAL RESISTANCE m² K/W ≤ 0,17
BODY VOLTAGE WALKING TEST K/W ≤ 2

Special Sizes Available (Felt backing option available):

For a minimum of 500 SQM:

48×48 cm
60×60 cm
60.96×60.96 cm

For a minimum of 100 SQM:

100×100 cm

For a minimum of 200 SQM:

100×50 cm
100×25 cm
25×100 cm
100×200 cm
100×150 cm

Please consider a 2% production coverage.

Athens



CONSTRUCTION
Tufted Loop Pile 1/10”

COMPOSITION
100% Polyamide SD

SECONDARY BACKING
POLYFLEX

STITCHES PER M²
± 173360

PILE HEIGHT ± 3.5 mm

TOTAL HEIGHT ± 5.2 mm

YARN WEIGHT ± 510 g/m²

TOTAL WEIGHT ± 3800 g/m²

TILE SIZE 50x50 cm



COLOUR FASTNESS TO LIGHT 5
INSULATION IMPACT NOISE ΔL_w 24 db
THERMAL RESISTANCE m² K/W ≤ 0,17
BODY VOLTAGE WALKING TEST K/W ≤ 2

Special Sizes Available (Felt backing option available):

For a minimum of 500 SQM:

48×48 cm
60×60 cm
60.96×60.96 cm

For a minimum of 100 SQM:

100×100 cm

For a minimum of 200 SQM:

100×50 cm
100×25 cm
25×100 cm
100×200 cm
100×150 cm

Please consider a 2% production coverage.