



# Tiles

## Collection

**RADICI**  
CARPET





# Tiles

## Collection

For over 70 years, we have been combining history, style, innovation, and design in the field of textile flooring for HORECA, offices, residential, and commercial spaces.

Our Tiles collections, designed for high-traffic areas, offer modularity, versatility and ease of replacement, blending style and functionality.

Our creations go beyond simple designer flooring, ensuring top-level durability, and comfort.

Da oltre 70 anni fondiamo storia, stile, innovazione e design nel settore della pavimentazione tessile per HORECA, uffici, residenziale e attività commerciali.

Le nostre collezioni Tiles, ideate per ambienti ad alto traffico, offrono modularità, versatilità e facilità di sostituzione, unendo stile e funzionalità.

Le nostre creazioni vanno oltre la semplice pavimentazione di design, garantendo durabilità e comfort di alto livello.





# Index

Parma.....10

Bologna.....14

Bologna Linea.....16

Assisi.....20

Ferrara.....24

Athens.....28

Napoli.....32

Napoli Linea.....34

Oslo.....38

Berlin.....42

Budapest.....46


Madrid.....50

Lisboa.....54

Barcelona.....58



# Solution Dyed yarn

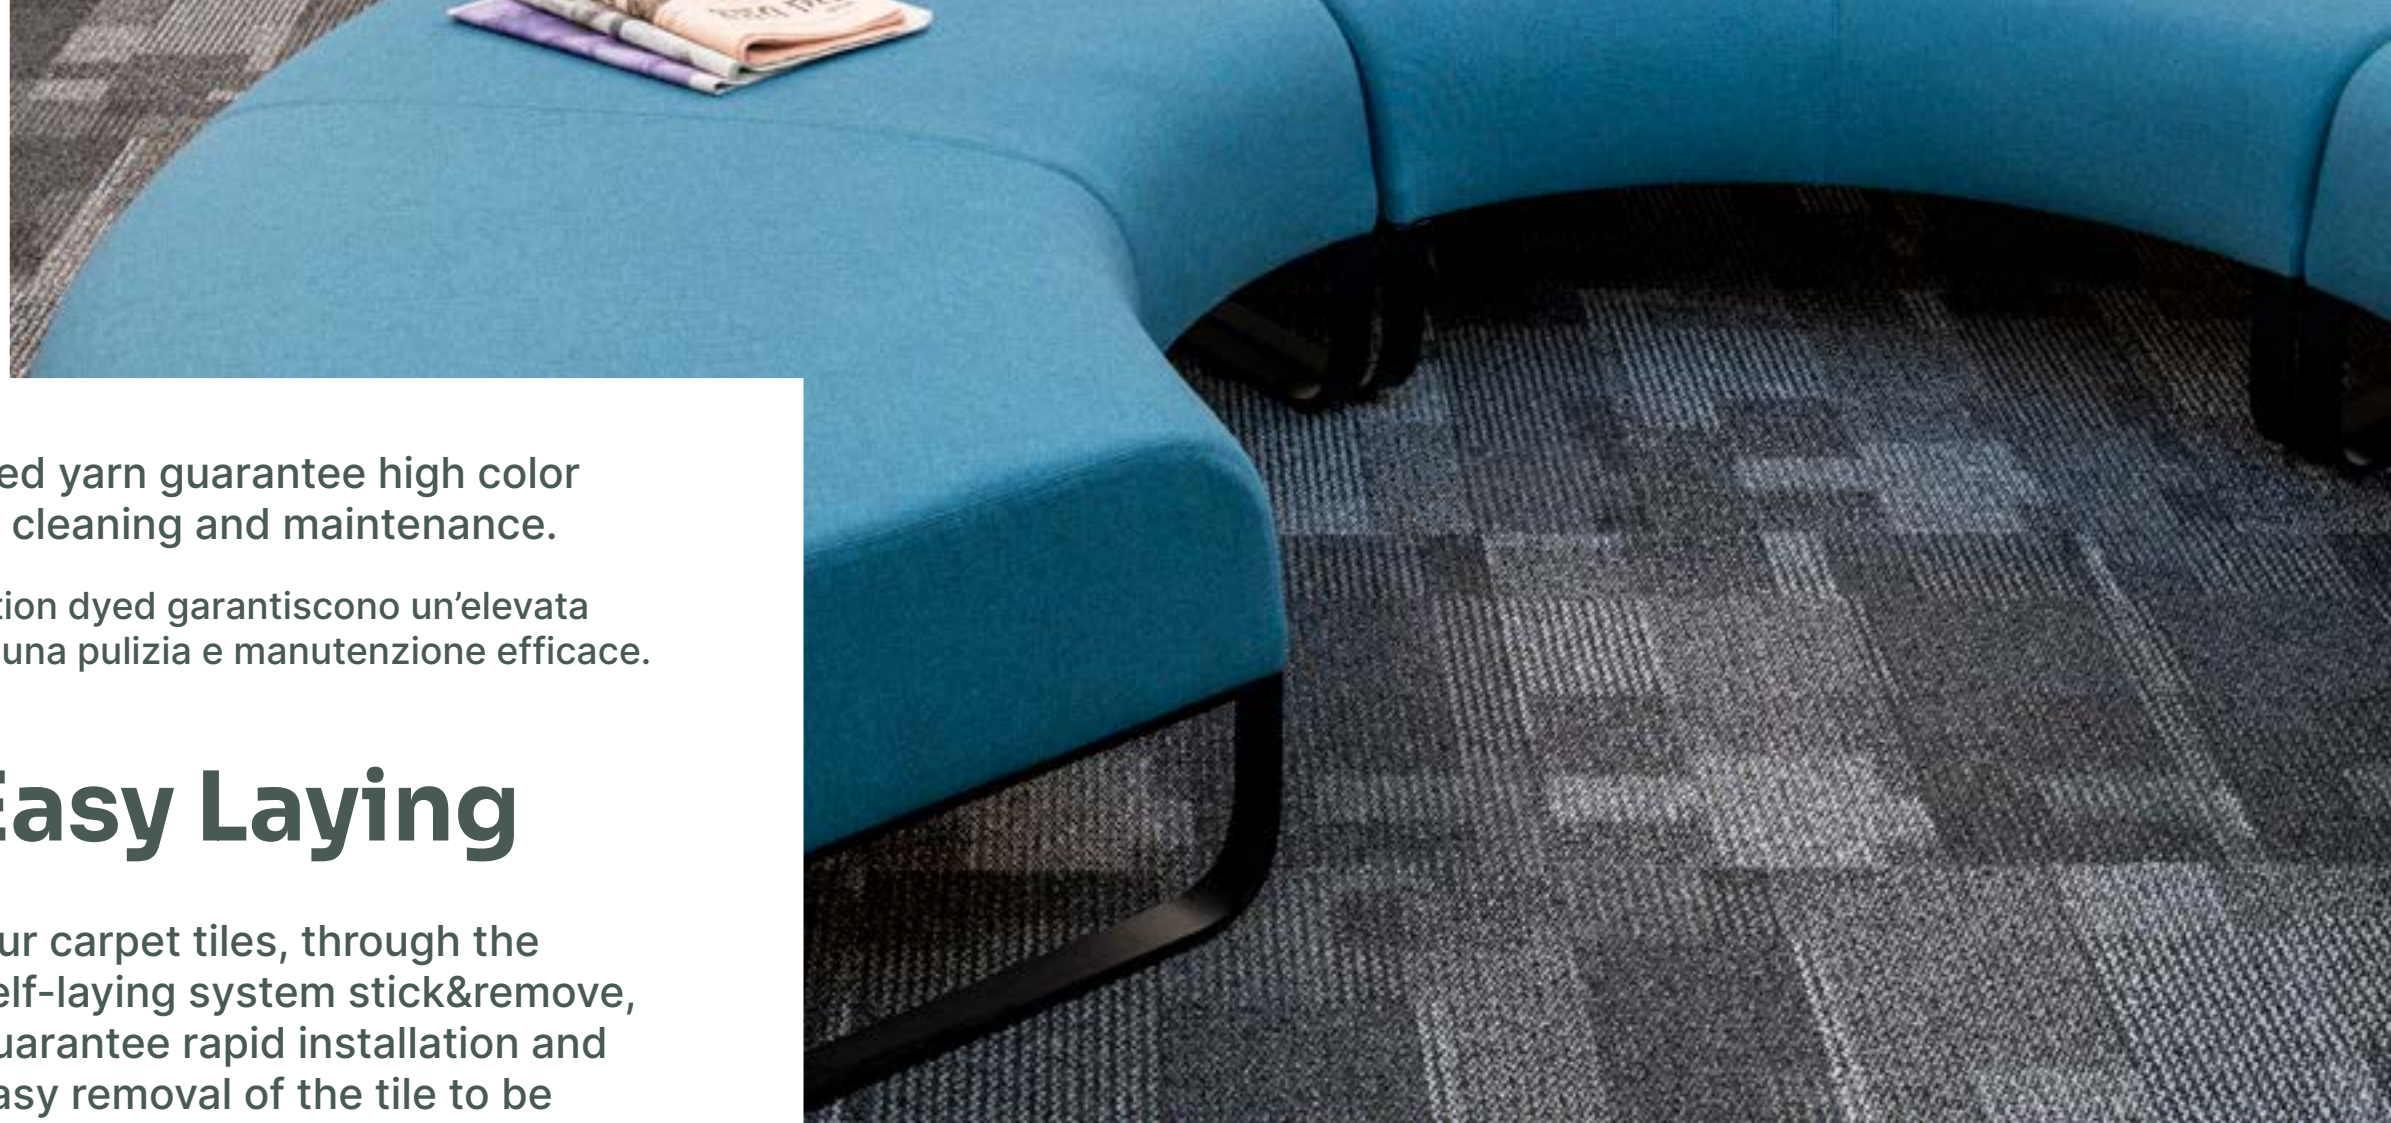

Radici's Tiles, made in solution dyed yarn guarantee high color long-term solidity and efficacious cleaning and maintenance.

Le Tiles Radici, realizzate in filato solution dyed garantiscono un'elevata solidità dei colori nel lungo periodo ed una pulizia e manutenzione efficace.

## Easy Laying

Our carpet tiles, through the self-laying system stick&remove, guarantee rapid installation and easy removal of the tile to be replaced.

Le nostre quadrotte, attraverso il sistema autoposante stacca-attacca, garantiscono una posa rapida ed una facile rimozione della quadrotta da sostituire.

## Intensive Use

Carpet tiles means maximum wear resistance, ideal for use in high-traffic environments. Our entire range is class33 certified.

Quadrotta significa massima resistenza all'usura, l'ideale per l'utilizzo in ambienti ad alto traffico. Tutta la nostra gamma è certificata classe 33.


## Modular Design

Thanks to the multidirectional laying direction our carpet tiles allow to create infinite combinations for a real modular design.

Le quadrotte grazie al senso di posa multidirezionale permettono di creare infinite combinazioni per un vero e proprio design modulare.





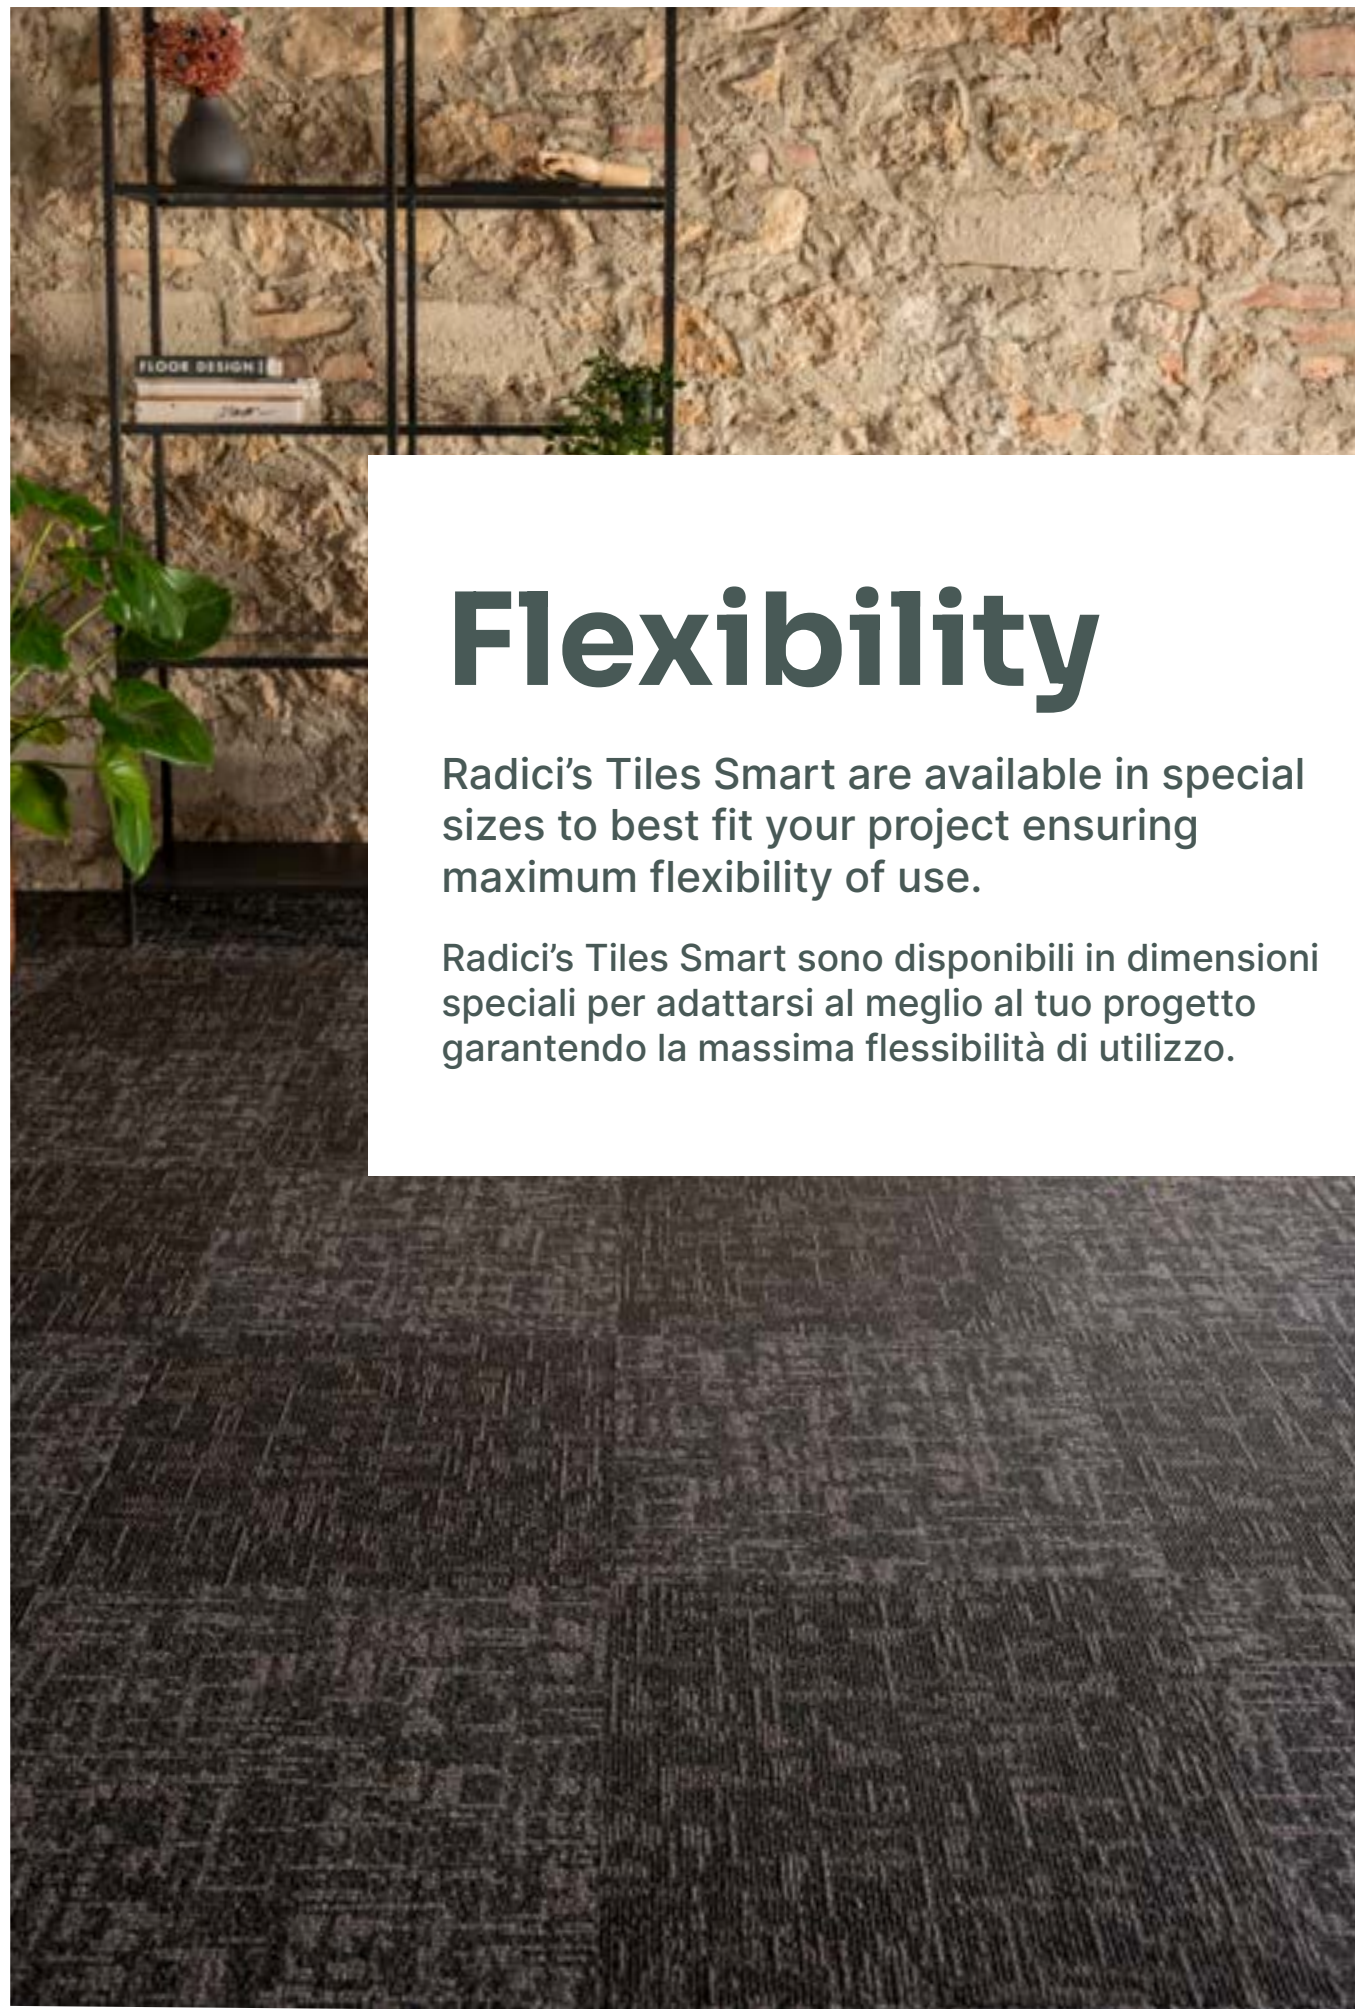

# Flexibility

Radici's Tiles Smart are available in special sizes to best fit your project ensuring maximum flexibility of use.

Radici's Tiles Smart sono disponibili in dimensioni speciali per adattarsi al meglio al tuo progetto garantendo la massima flessibilità di utilizzo.



## Special Sizes Available

(Felt backing option available from 200 SQM)

**For a minimum of 500 SQM:**

48×48 cm  
60×60 cm  
60.96×60.96 cm

**For a minimum of 100 SQM:**

100×100 cm

**For a minimum of 200 SQM:**

100×50 cm  
100×25 cm  
25×100 cm  
100×200 cm  
100×150 cm

**Please consider a 2% production coverage.**





# Parma



TILES 50X50 CM, SOLUTION DYED  
LIVING COLLECTION  
AVAILABLE IN 9 COLORS



Colors Book Parma



1870



24115



2474




1893



18289



18410

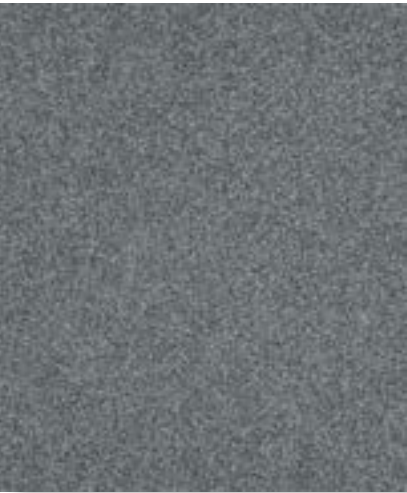

1875



1876



2477

PARMA

 EN14041



Specifications and tolerances in according EN 1307

ECONYL®

| Costruzione                   | Construction                  | Technique de fabrication | Herstellungsverfahren          |
|-------------------------------|-------------------------------|--------------------------|--------------------------------|
| Tufting velluto- frisée 1/10" | Tufted cut pile- frisée 1/10" | Tufted cut-frisée 1/10"  | Getufted schnitt- frisée 1/10" |
| Composizione                  | Composition                   | Composition              | Polnutschicht                  |
| 100% Poliammide Econyl SD     | 100% Polyamide Econyl SD      | 100% Polyamide Econyl SD | 100% Polyamid Econyl SD        |
| Sottofondo                    | Secondary backing             | Dossier                  | Rückenausrüstung               |
| Polyflex                      | Polyflex                      | Polyflex                 | Polyflex                       |
| Punti al m²                   | Stitches per m²               | Touffes au m²            | Knoten m²                      |
| ± 178000                      | ± 178000                      | ± 178000                 | ± 178000                       |
| Altezza pelo                  | Pile height                   | Hauteur du velours       | Polhöhe                        |
| ± 5.5 mm                      | ± 5.5 mm                      | ± 5.5 mm                 | ± 5.5 mm                       |
| Altezza totale                | Total height                  | Hauteur totale           | Gesamthöhe                     |
| ± 6.2 mm                      | ± 6.2 mm                      | ± 6.2 mm                 | ± 6.2 mm                       |
| Peso fibra                    | Yarn weight                   | Poids du velours         | Polgewicht                     |
| ± 1100 g/m²                   | ± 1100 g/m²                   | ± 1100 g/m²              | ± 1100 g/m²                    |
| Peso totale                   | Total weight                  | Poids total              | Gesamtgewicht                  |
| ± 4800 g/m²                   | ± 4800 g/m²                   | ± 4800 g/m²              | ± 4800 g/m²                    |
| Dimensioni quadrotta          | Tile size                     | Tailles des dalle        | Gesamtgewicht                  |
| 50x50 cm                      | 50x50 cm                      | 50x50 cm                 | 50x50 cm                       |
| Famiglia tufting 27           | Famiglia tufting 27           | Famiglia tufting 27      | Famiglia tufting 27            |



Business Wearability: ★ ★ ★

|                             |       |                              |        |
|-----------------------------|-------|------------------------------|--------|
| Colour fastness to light    | > 5   | Thermal resistance m² K/W    | ≤ 0,17 |
| Insulation impact noise ΔLw | 25 dB | Body voltage walking test kV | ≤ 2    |





# Bologna



TILES 50X50 CM, SOLUTION DYED  
LIVING COLLECTION  
AVAILABLE IN 13 COLORS







# Bologna Linea

TILES 50X50 CM, SOLUTION DYED  
LIVING COLLECTION  
AVAILABLE IN 4 COLORS





Colors Book Bologna + Linea



222570



222594



222593



222520



222541




222582



222583



222575



222574



222576



222578



2228377



2227883



2227877



2227873

**Bologna**

**Linea**

BOLOGNA-BOLOGNA LINEA

RADICI  
CARPET

 EN14041



Specifications and tolerances in according EN 1307

| Costruzione          | Construction           | Technique de fabrication | Herstellungsverfahren   |
|----------------------|------------------------|--------------------------|-------------------------|
| Tufting Riccio 1/10" | Tufted Loop Pile 1/10" | Tufted Bouclé 1/10"      | Getufted Schlinge 1/10" |
| Composizione         | Composition            | Composition              | Polnutschicht           |
| 100% Poliammide SD   | 100% Polyamide SD      | 100% Polyamide SD        | 100% Polyamid SD        |
| Sottofondo           | Secondary Backing      | Dossier                  | Rückenausrüstung        |
| Polyflex             | Polyflex               | Polyflex                 | Polyflex                |
| Punti al m²          | Stitches per m²        | Touffes au m²            | Knoten m²               |
| ± 189600             | ± 189600               | ± 189600                 | ± 189600                |
| Altezza pelo         | Pile Height            | Hauteur du velours       | Polhöhe                 |
| ± 3.0 mm             | ± 3.0 mm               | ± 3.0 mm                 | ± 3.0 mm                |
| Altezza totale       | Total Height           | Hauteur totale           | Gesamthöhe              |
| ± 5.4 mm             | ± 5.4 mm               | ± 5.4 mm                 | ± 5.4 mm                |
| Peso fibra           | Yarn Weight            | Poids du velours         | Polgewicht              |
| ± 540 g/m²           | ± 540 g/m²             | ± 540 g/m²               | ± 540 g/m²              |
| Peso totale          | Total Weight           | Poids total              | Gesamtgewicht           |
| ± 4100 g/m²          | ± 4100 g/m²            | ± 4100 g/m²              | ± 4100 g/m²             |
| Dimensioni quadrotta | Tile Size              | Tailles des dalle        | Gesamtgewicht           |
| 50x50 cm             | 50x50 cm               | 50x50 cm                 | 50x50 cm                |
| Famiglia Tufting 26  | Famiglia Tufting 26    | Famiglia Tufting 26      | Famiglia Tufting 26     |



BUSINESS WEARABILITY: ★ ★ ★

|                             |       |                              |        |
|-----------------------------|-------|------------------------------|--------|
| Colour fastness to light    | > 5   | Thermal resistance m² K/W    | ≤ 0,17 |
| Insulation impact noise ΔLw | 24 dB | Body voltage walking test kV | ≤ 2    |





# Assisi



TILES 50X50 CM, SOLUTION DYED  
LIVING COLLECTION  
AVAILABLE IN 8 COLORS





Colors Book Assisi



244647



244555



244556



244575



244547



244573



244677



244578

ASSISI

 EN14041



Specifications and tolerances in according EN 1307

| Costruzione                     | Construction                      | Technique de fabrication       | Herstellungsverfahren             |
|---------------------------------|-----------------------------------|--------------------------------|-----------------------------------|
| Tufting Riccio- Scroll<br>1/10" | Tufted Loop Pile -Scroll<br>1/10" | Tufted Bouclé -Scroll<br>1/10" | Getufted Schlinge-Scroll<br>1/10" |
| Composizione                    | Composition                       | Composition                    | Polnutschicht                     |
| 100% Poliammide SD              | 100% Polyamide SD                 | 100% Polyamide SD              | 100% Polyamid SD                  |
| Sottofondo                      | Secondary Backing                 | Dossier                        | Rückenausrüstung                  |
| Polyflex                        | Polyflex                          | Polyflex                       | Polyflex                          |
| Punti al m²                     | Stitches per m²                   | Touffes au m²                  | Knoten m²                         |
| ± 177750                        | ± 177750                          | ± 177750                       | ± 177750                          |
| Altezza pelo                    | Pile Height                       | Hauteur du velours             | Polhöhe                           |
| ± 2.2 mm                        | ± 2.2 mm                          | ± 2.2 mm                       | ± 2.2 mm                          |
| Altezza totale                  | Total Height                      | Hauteur totale                 | Gesamthöhe                        |
| ± 5.5 mm                        | ± 5.5 mm                          | ± 5.5 mm                       | ± 5.5 mm                          |
| Peso fibra                      | Yarn Weight                       | Poids du velours               | Polgewicht                        |
| ± 550 g/m²                      | ± 550 g/m²                        | ± 550 g/m²                     | ± 550 g/m²                        |
| Peso totale                     | Total Weight                      | Poids total                    | Gesamtgewicht                     |
| ± 3900 g/m²                     | ± 3900 g/m²                       | ± 3900 g/m²                    | ± 3900 g/m²                       |
| Dimensioni quadrotta            | Tile Size                         | Tailles des dalles             | Gesamtgewicht                     |
| 50x50 cm                        | 50x50 cm                          | 50x50 cm                       | 50x50 cm                          |
| Assisi                          | Assisi                            | Assisi                         | Assisi                            |



BUSINESS WEARABILITY: ★ ★ ★

|                             |       |                              |        |
|-----------------------------|-------|------------------------------|--------|
| Colour fastness to light    | > 5   | Thermal resistance m² K/W    | ≤ 0,17 |
| Insulation impact noise ΔLw | 20 dB | Body voltage walking test kV | ≤ 2    |






# Ferrara



TILES 50X50 CM, SOLUTION DYED  
LIVING COLLECTION  
AVAILABLE IN 20 COLORS

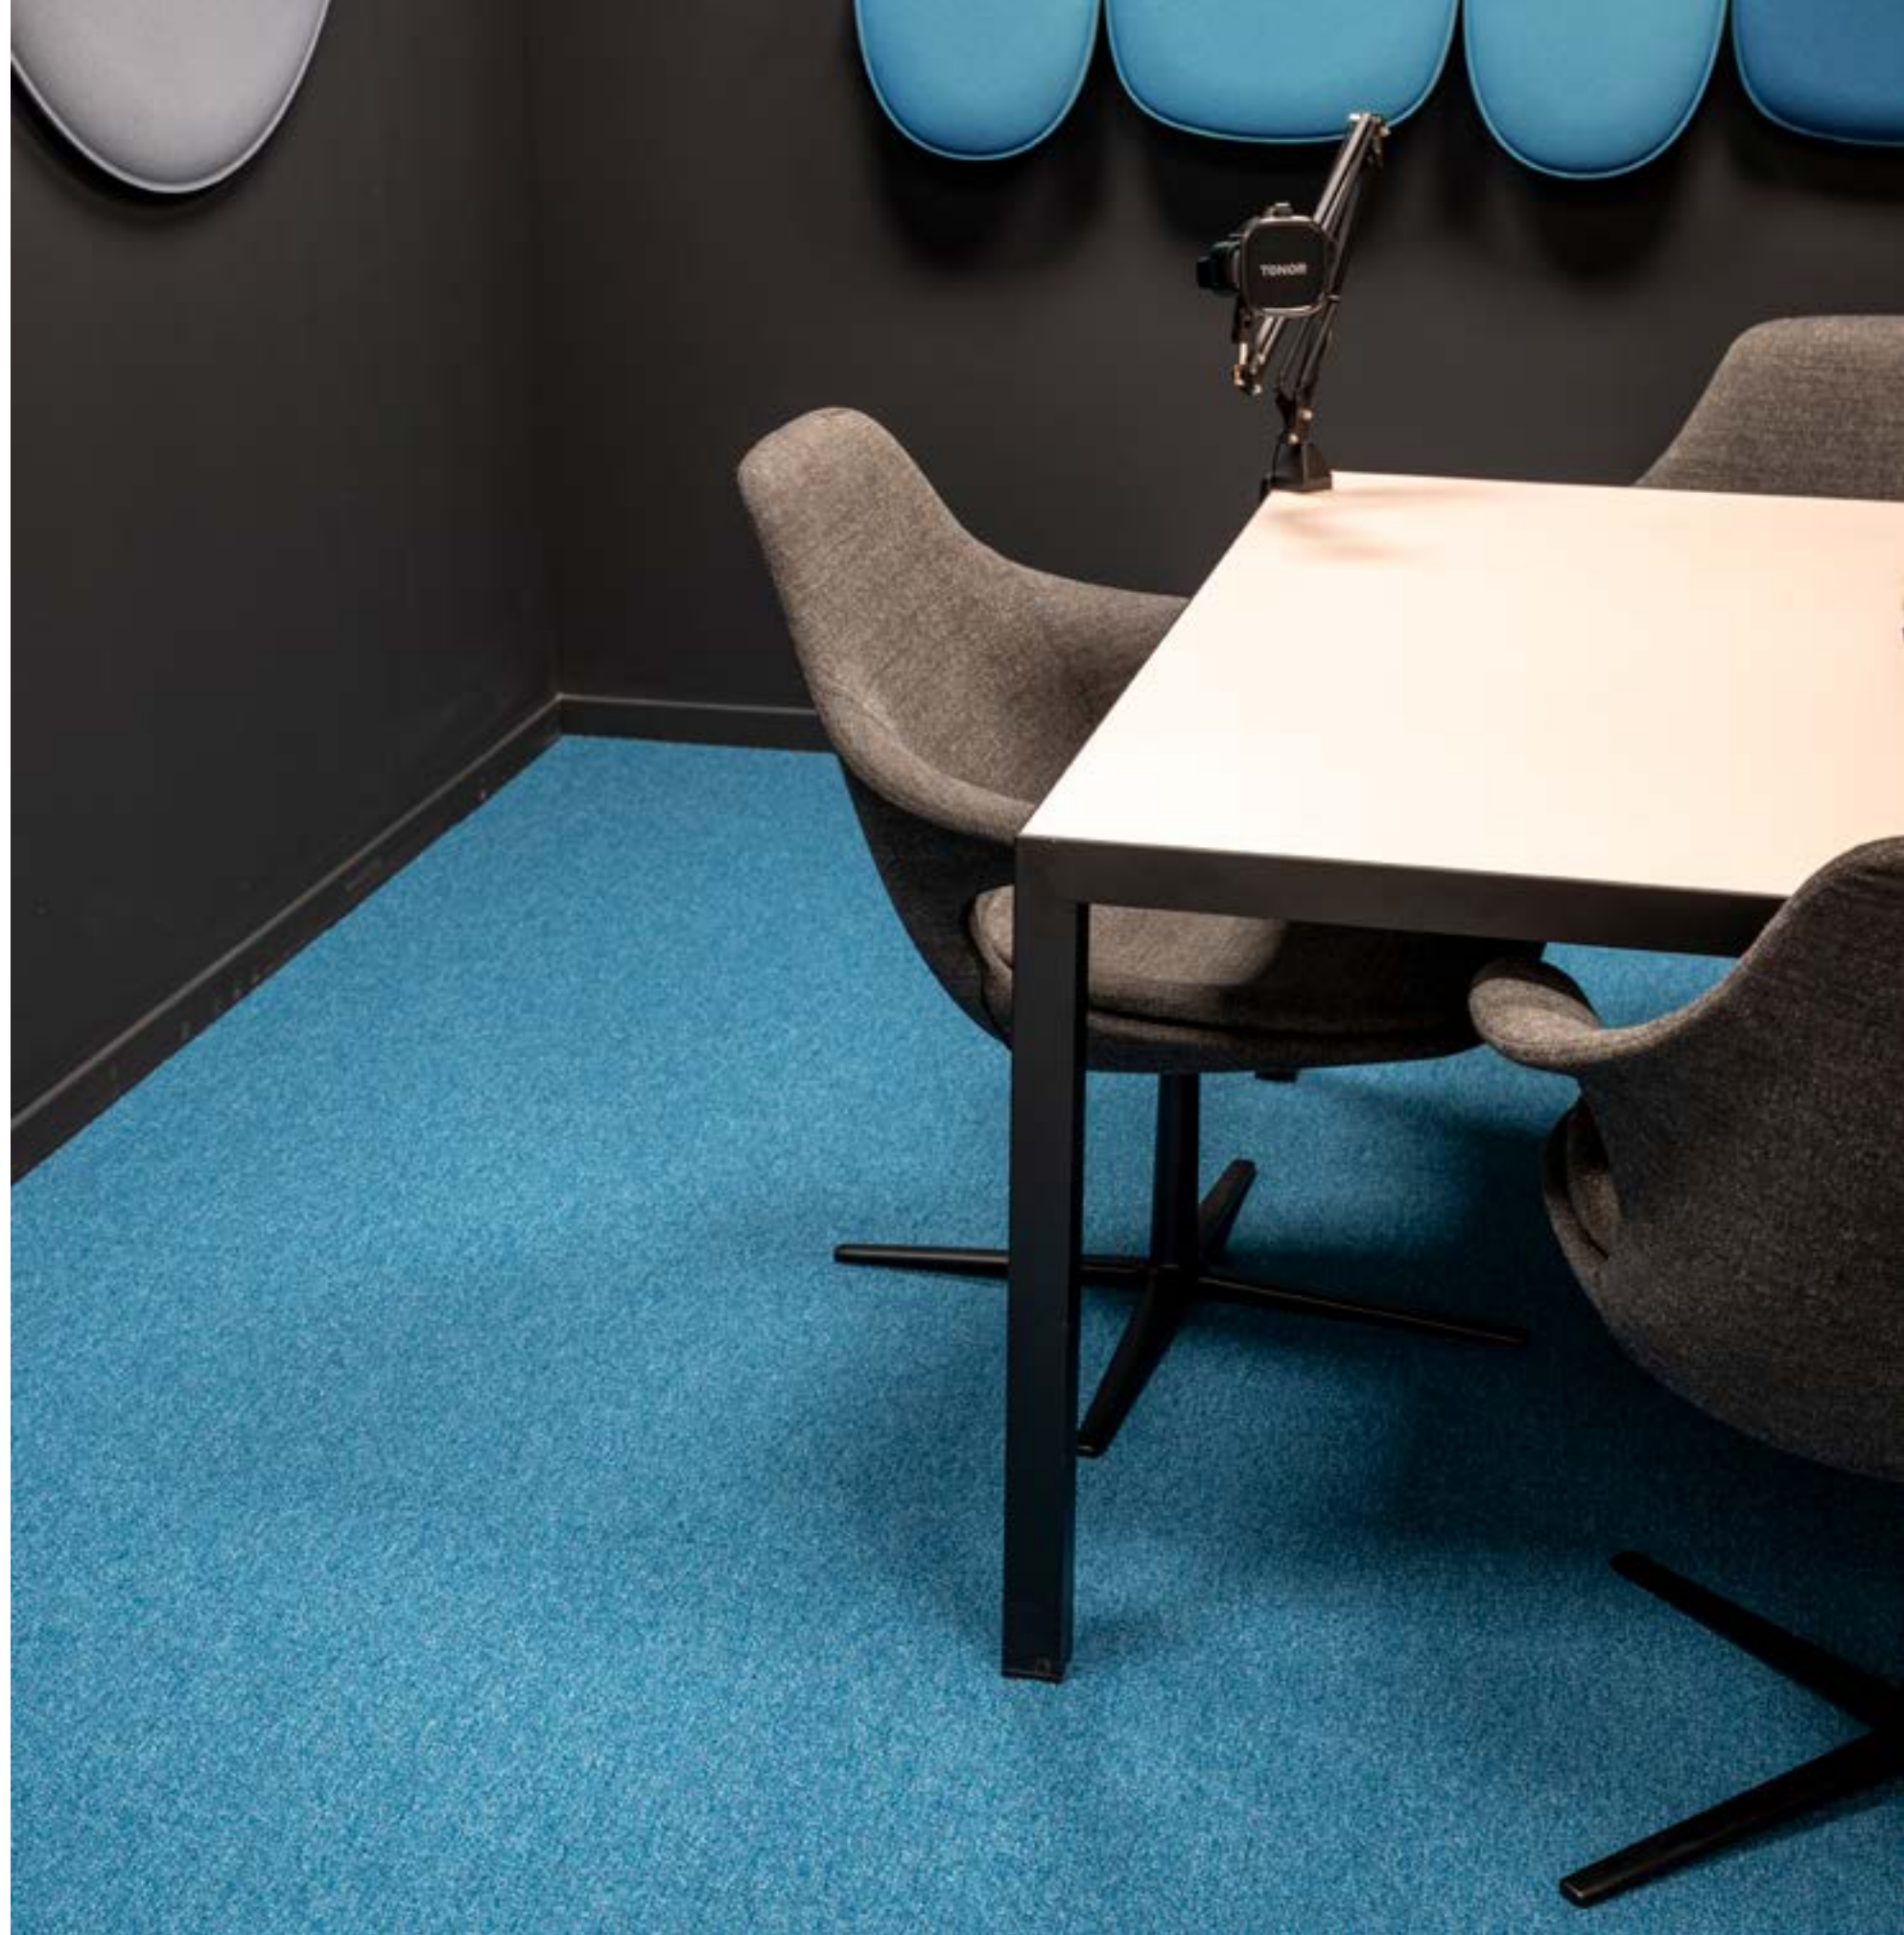



Colors Book Ferrara




2464010



2464020



2464031



2464032



2464033



2464049



2464038



2464080



2464073



2464083



2464096



2464063



2464060



2464061



2464040



2464041



2464044



2464042



2464050



2464055

FERRARA

CE

EN14041

Bfl-s1

DS

E1

HCHO

Specifications and tolerances in according EN 1307

| Costruzione          | Construction           | Technique de fabrication | Herstellungsverfahren   |
|----------------------|------------------------|--------------------------|-------------------------|
| Tufting Riccio 1/10" | Tufted Loop Pile 1/10" | Tufted Bouclé 1/10"      | Getufted Schlinge 1/10" |
| Composizione         | Composition            | Composition              | Polnutschicht           |
| 100% Poliammide SD   | 100% Polyamide SD      | 100% Polyamide SD        | 100% Polyamid SD        |
| Sottofondo           | Secondary Backing      | Dossier                  | Rückenausrüstung        |
| Polyflex             | Polyflex               | Polyflex                 | Polyflex                |
| Punti al m²          | Stitches per m²        | Touffes au m²            | Knoten m²               |
| ± 164000             | ± 164000               | ± 164000                 | ± 164000                |
| Altezza pelo         | Pile Height            | Hauteur du velours       | Polhöhe                 |
| ± 2.6 mm             | ± 2.6 mm               | ± 2.6 mm                 | ± 2.6 mm                |
| Altezza totale       | Total Height           | Hauteur totale           | Gesamthöhe              |
| ± 5.4 mm             | ± 5.4 mm               | ± 5.4 mm                 | ± 5.4 mm                |
| Peso fibra           | Yarn Weight            | Poids du velours         | Polgewicht              |
| ± 550 g/m²           | ± 550 g/m²             | ± 550 g/m²               | ± 550 g/m²              |
| Peso totale          | Total Weight           | Poids total              | Gesamtgewicht           |
| ± 3990 g/m²          | ± 3990 g/m²            | ± 3990 g/m²              | ± 3990 g/m²             |
| Dimensioni quadrotta | Tile Size              | Tailles des dalle        | Gesamtgewicht           |
| 50x50 cm             | 50x50 cm               | 50x50 cm                 | 50x50 cm                |
| Ferrara              | Ferrara                | Ferrara                  | Ferrara                 |



Business Wearability: ★ ★ ★

|                             |       |                              |        |
|-----------------------------|-------|------------------------------|--------|
| Colour fastness to light    | > 5   | Thermal resistance m² K/W    | ≤ 0,17 |
| Insulation impact noise ΔLw | 23 dB | Body voltage walking test kV | ≤ 2    |





# Athens




TILES 50X50 CM, SOLUTION DYED  
LIVING COLLECTION  
AVAILABLE IN 8 COLORS





Colors Book Athens

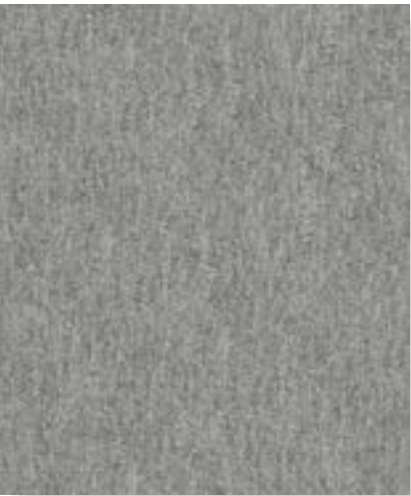

242772



222777



222776



242784



222783



242793



2227278



222778

ATHENS

 EN14041



Specifications and tolerances in according EN 1307

| Costruzione          | Construction           | Technique de fabrication | Herstellungsverfahren   |
|----------------------|------------------------|--------------------------|-------------------------|
| Tufting Riccio 1/10" | Tufted Loop Pile 1/10" | Tufted Bouclé 1/10"      | Getufted Schlinge 1/10" |
| Composizione         | Composition            | Composition              | Polnutschicht           |
| 100% Poliammide SD   | 100% Polyamide SD      | 100% Polyamide SD        | 100% Polyamid SD        |
| Sottofondo           | Secondary Backing      | Dossier                  | Rückenausrüstung        |
| Polyflex             | Polyflex               | Polyflex                 | Polyflex                |
| Punti al m²          | Stitches per m²        | Touffes au m²            | Knoten m²               |
| ± 173360             | ± 173360               | ± 173360                 | ± 173360                |
| Altezza pelo         | Pile Height            | Hauteur du velours       | Polhöhe                 |
| ± 3.5 mm             | ± 3.5 mm               | ± 3.5 mm                 | ± 3.5 mm                |
| Altezza totale       | Total Height           | Hauteur totale           | Gesamthöhe              |
| ± 5.2 mm             | ± 5.2 mm               | ± 5.2 mm                 | ± 5.2 mm                |
| Peso fibra           | Yarn Weight            | Poids du velours         | Polgewicht              |
| ± 510 g/m²           | ± 510 g/m²             | ± 510 g/m²               | ± 510 g/m²              |
| Peso totale          | Total Weight           | Poids total              | Gesamtgewicht           |
| ± 3800 g/m²          | ± 3800 g/m²            | ± 3800 g/m²              | ± 3800 g/m²             |
| Dimensioni quadrotta | Tile Size              | Tailles des dalle        | Gesamtgewicht           |
| 50x50 cm             | 50x50 cm               | 50x50 cm                 | 50x50 cm                |
| Famiglia Tufting 26  | Famiglia Tufting 26    | Famiglia Tufting 26      | Famiglia Tufting 26     |



Business Wearability: ★ ★ ★

|                             |       |                              |        |
|-----------------------------|-------|------------------------------|--------|
| Colour fastness to light    | > 5   | Thermal resistance m² K/W    | ≤ 0,17 |
| Insulation impact noise ΔLw | 24 dB | Body voltage walking test kV | ≤ 2    |





# Napoli



TILES 50X50 CM, SOLUTION DYED  
LIVING COLLECTION  
AVAILABLE IN 11 COLORS







# Napoli Linea

TILES 50X50 CM, SOLUTION DYED  
LIVING COLLECTION  
AVAILABLE IN 9 COLORS





Colors Book Napoli + Linea



224470



224472



224493



224420



224482



224483



224441




224475



224476



224477



224478



224175



224575




224183



224583



224578




224520



224120



224577



224178

NAPOLI-NAPOLI LINEA

RADICI  
CARPET

CEEN14041

Bfl-s1

DS

E1  
HCHO



Specifications and tolerances in according EN 1307

| Costruzione          | Construction           | Technique de fabrication | Herstellungsverfahren   |
|----------------------|------------------------|--------------------------|-------------------------|
| Tufting Riccio 1/10" | Tufted Loop Pile 1/10" | Tufted Bouclé 1/10"      | Getuftet Schlinge 1/10" |
| Composizione         | Composition            | Composition              | Polnutschicht           |
| 100% Poliammide SD   | 100% Polyamide SD      | 100% Polyamide SD        | 100% Polyamid SD        |
| Sottofondo           | Secondary Backing      | Dossier                  | Rückenausrüstung        |
| Polyflex             | Polyflex               | Polyflex                 | Polyflex                |
| Punti al m²          | Stitches per m²        | Touffes au m²            | Knoten m²               |
| ± 187000             | ± 187000               | ± 187000                 | ± 187000                |
| Altezza pelo         | Pile Height            | Hauteur du velours       | Polhöhe                 |
| ± 3.5 mm             | ± 3.5 mm               | ± 3.5 mm                 | ± 3.5 mm                |
| Altezza totale       | Total Height           | Hauteur totale           | Gesamthöhe              |
| ± 5.4 mm             | ± 5.4 mm               | ± 5.4 mm                 | ± 5.4 mm                |
| Peso fibra           | Yarn Weight            | Poids du velours         | Polgewicht              |
| ± 550 g/m²           | ± 550 g/m²             | ± 550 g/m²               | ± 550 g/m²              |
| Peso totale          | Total Weight           | Poids total              | Gesamtgewicht           |
| ± 4100 g/m²          | ± 4100 g/m²            | ± 4100 g/m²              | ± 4100 g/m²             |
| Dimensioni quadrotta | Tile Size              | Tailles des dalle        | Gesamtgewicht           |
| 50x50 cm             | 50x50 cm               | 50x50 cm                 | 50x50 cm                |
| Famiglia Tufting 26  | Famiglia Tufting 26    | Famiglia Tufting 26      | Famiglia Tufting 26     |



BUSINESS WEARABILITY: ★ ★ ★

|                             |       |                              |        |
|-----------------------------|-------|------------------------------|--------|
| Colour fastness to light    | > 5   | Thermal resistance m² K/W    | ≤ 0,17 |
| Insulation impact noise ΔLw | 24 dB | Body voltage walking test kV | ≤ 2    |





# Oslo



TILES 50X50 CM, SOLUTION DYED  
LOUNGE COLLECTION  
AVAILABLE IN 11 COLORS





Colors Book Oslo



246544



246546



246547




246549




246545



246576

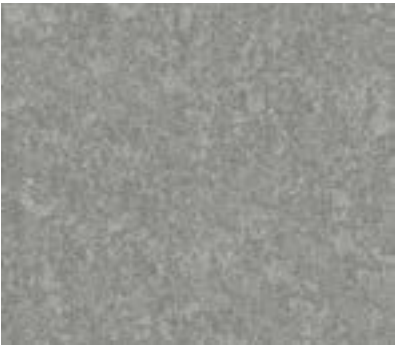

246575

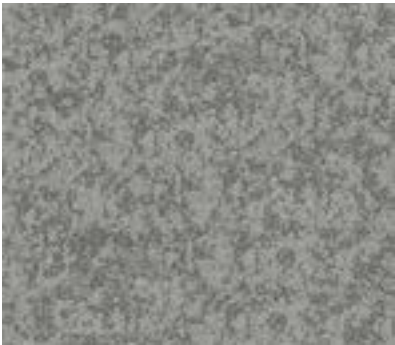

246574



246558



246577



246578

OSLO

 EN14041



Specifications and tolerances in according EN 1307

| Costruzione                     | Construction                      | Technique de fabrication       | Herstellungsverfahren             |
|---------------------------------|-----------------------------------|--------------------------------|-----------------------------------|
| Tufting Riccio- Scroll<br>1/10" | Tufted Loop Pile -Scroll<br>1/10" | Tufted Bouclé -Scroll<br>1/10" | Getufted Schlinge-Scroll<br>1/10" |
| Composizione                    | Composition                       | Composition                    | Polnutschicht                     |
| 100% Poliammide SD              | 100% Polyamide SD                 | 100% Polyamide SD              | 100% Polyamid SD                  |
| Sottofondo                      | Secondary Backing                 | Dossier                        | Rückenausrüstung                  |
| Polyflex                        | Polyflex                          | Polyflex                       | Polyflex                          |
| Punti al m²                     | Stitches per m²                   | Touffes au m²                  | Knoten m²                         |
| ± 208820                        | ± 208820                          | ± 208820                       | ± 208820                          |
| Altezza pelo                    | Pile Height                       | Hauteur du velours             | Polhöhe                           |
| ± 2.5 mm                        | ± 2.5 mm                          | ± 2.5 mm                       | ± 2.5 mm                          |
| Altezza totale                  | Total Height                      | Hauteur totale                 | Gesamthöhe                        |
| ± 5.4 mm                        | ± 5.4 mm                          | ± 5.4 mm                       | ± 5.4 mm                          |
| Peso fibra                      | Yarn Weight                       | Poids du velours               | Polgewicht                        |
| ± 550 g/m²                      | ± 550 g/m²                        | ± 550 g/m²                     | ± 550 g/m²                        |
| Peso totale                     | Total Weight                      | Poids total                    | Gesamtgewicht                     |
| ± 4000 g/m²                     | ± 4000 g/m²                       | ± 4000 g/m²                    | ± 4000 g/m²                       |
| Dimensioni quadrotta            | Tile Size                         | Tailles des dalles             | Gesamtgewicht                     |
| 50x50 cm                        | 50x50 cm                          | 50x50 cm                       | 50x50 cm                          |
| OSLO                            | OSLO                              | OSLO                           | OSLO                              |



BUSINESS WEARABILITY: ★ ★ ★

|                             |       |                              |        |
|-----------------------------|-------|------------------------------|--------|
| Colour fastness to light    | > 5   | Thermal resistance m² K/W    | ≤ 0,17 |
| Insulation impact noise ΔLw | 24 dB | Body voltage walking test kV | ≤ 2    |





# Berlin



TILES 50X50 CM, SOLUTION DYED  
LOUNGE COLLECTION  
AVAILABLE IN 15 COLORS





Colors Book Berlin



196170



196190



196173



246051



246151



246020



246120



246042



246142



196180



196183



196174



196178



196176



196177

BERLIN

 EN14041



Specifications and tolerances in according EN 1307

| Costruzione          | Construction           | Technique de fabrication | Herstellungsverfahren   |
|----------------------|------------------------|--------------------------|-------------------------|
| Tufting Riccio 1/10" | Tufted Loop Pile 1/10" | Tufted Bouclé 1/10"      | Getufted Schlinge 1/10" |
| Composizione         | Composition            | Composition              | Polnutschicht           |
| 100% Poliammide SD   | 100% Polyamide SD      | 100% Polyamide SD        | 100% Polyamid SD        |
| Sottofondo           | Secondary Backing      | Dossier                  | Rückenausrüstung        |
| Polyflex             | Polyflex               | Polyflex                 | Polyflex                |
| Punti al m²          | Stitches per m²        | Touffes au m²            | Knoten m²               |
| ± 189600             | ± 189600               | ± 189600                 | ± 189600                |
| Altezza pelo         | Pile Height            | Hauteur du velours       | Polhöhe                 |
| ± 3.0 mm             | ± 3.0 mm               | ± 3.0 mm                 | ± 3.0 mm                |
| Altezza totale       | Total Height           | Hauteur totale           | Gesamthöhe              |
| ± 5.6 mm             | ± 5.6 mm               | ± 5.6 mm                 | ± 5.6 mm                |
| Peso fibra           | Yarn Weight            | Poids du velours         | Polgewicht              |
| ± 740 g/m²           | ± 740 g/m²             | ± 740 g/m²               | ± 740 g/m²              |
| Peso totale          | Total Weight           | Poids total              | Gesamtgewicht           |
| ± 4200 g/m²          | ± 4200 g/m²            | ± 4200 g/m²              | ± 4200 g/m²             |
| Dimensioni quadrotta | Tile Size              | Tailles des dalle        | Gesamtgewicht           |
| 50x50 cm             | 50x50 cm               | 50x50 cm                 | 50x50 cm                |
| Famiglia Tufting 26  | Famiglia Tufting 26    | Famiglia Tufting 26      | Famiglia Tufting 26     |



Business Wearability: ★ ★ ★

|                             |       |                              |        |
|-----------------------------|-------|------------------------------|--------|
| Colour fastness to light    | > 5   | Thermal resistance m² K/W    | ≤ 0,17 |
| Insulation impact noise ΔLw | 24 dB | Body voltage walking test kV | ≤ 2    |





# Budapest



TILES 50X50 CM, SOLUTION DYED  
LOUNGE COLLECTION  
AVAILABLE IN 8 COLORS





Colors Book Budapest



243647



243555



243556



243575



243547



243573



243677



243578

BUDAPEST

 EN14041



Specifications and tolerances in according EN 1307

| Costruzione                     | Construction                      | Technique de fabrication       | Herstellungsverfahren             |
|---------------------------------|-----------------------------------|--------------------------------|-----------------------------------|
| Tufting Riccio- Scroll<br>1/10" | Tufted Loop Pile -Scroll<br>1/10" | Tufted Bouclé -Scroll<br>1/10" | Getufted Schlinge-Scroll<br>1/10" |
| Composizione                    | Composition                       | Composition                    | Polnutschicht                     |
| 100% Poliammide SD              | 100% Polyamide SD                 | 100% Polyamide SD              | 100% Polyamid SD                  |
| Sottofondo                      | Secondary Backing                 | Dossier                        | Rückenausrüstung                  |
| Polyflex                        | Polyflex                          | Polyflex                       | Polyflex                          |
| Punti al m²                     | Stitches per m²                   | Touffes au m²                  | Knoten m²                         |
| ± 205400                        | ± 205400                          | ± 205400                       | ± 205400                          |
| Altezza pelo                    | Pile Height                       | Hauteur du velours             | Polhöhe                           |
| ± 2.9 mm                        | ± 2.9 mm                          | ± 2.9 mm                       | ± 2.9 mm                          |
| Altezza totale                  | Total Height                      | Hauteur totale                 | Gesamthöhe                        |
| ± 5.5 mm                        | ± 5.5 mm                          | ± 5.5 mm                       | ± 5.5 mm                          |
| Peso fibra                      | Yarn Weight                       | Poids du velours               | Polgewicht                        |
| ± 550 g/m²                      | ± 550 g/m²                        | ± 550 g/m²                     | ± 550 g/m²                        |
| Peso totale                     | Total Weight                      | Poids total                    | Gesamtgewicht                     |
| ± 4000 g/m²                     | ± 4000 g/m²                       | ± 4000 g/m²                    | ± 4000 g/m²                       |
| Dimensioni quadrotta            | Tile Size                         | Tailles des dalles             | Gesamtgewicht                     |
| 50x50 cm                        | 50x50 cm                          | 50x50 cm                       | 50x50 cm                          |
| BUDAPEST                        | BUDAPEST                          | BUDAPEST                       | BUDAPEST                          |



BUSINESS WEARABILITY: ★ ★ ★

|                             |       |                              |        |
|-----------------------------|-------|------------------------------|--------|
| Colour fastness to light    | > 5   | Thermal resistance m² K/W    | ≤ 0,17 |
| Insulation impact noise ΔLw | 20 dB | Body voltage walking test kV | ≤ 2    |






# Madrid



TILES 50X50 CM, SOLUTION DYED  
LOUNGE COLLECTION  
AVAILABLE IN 13 COLORS

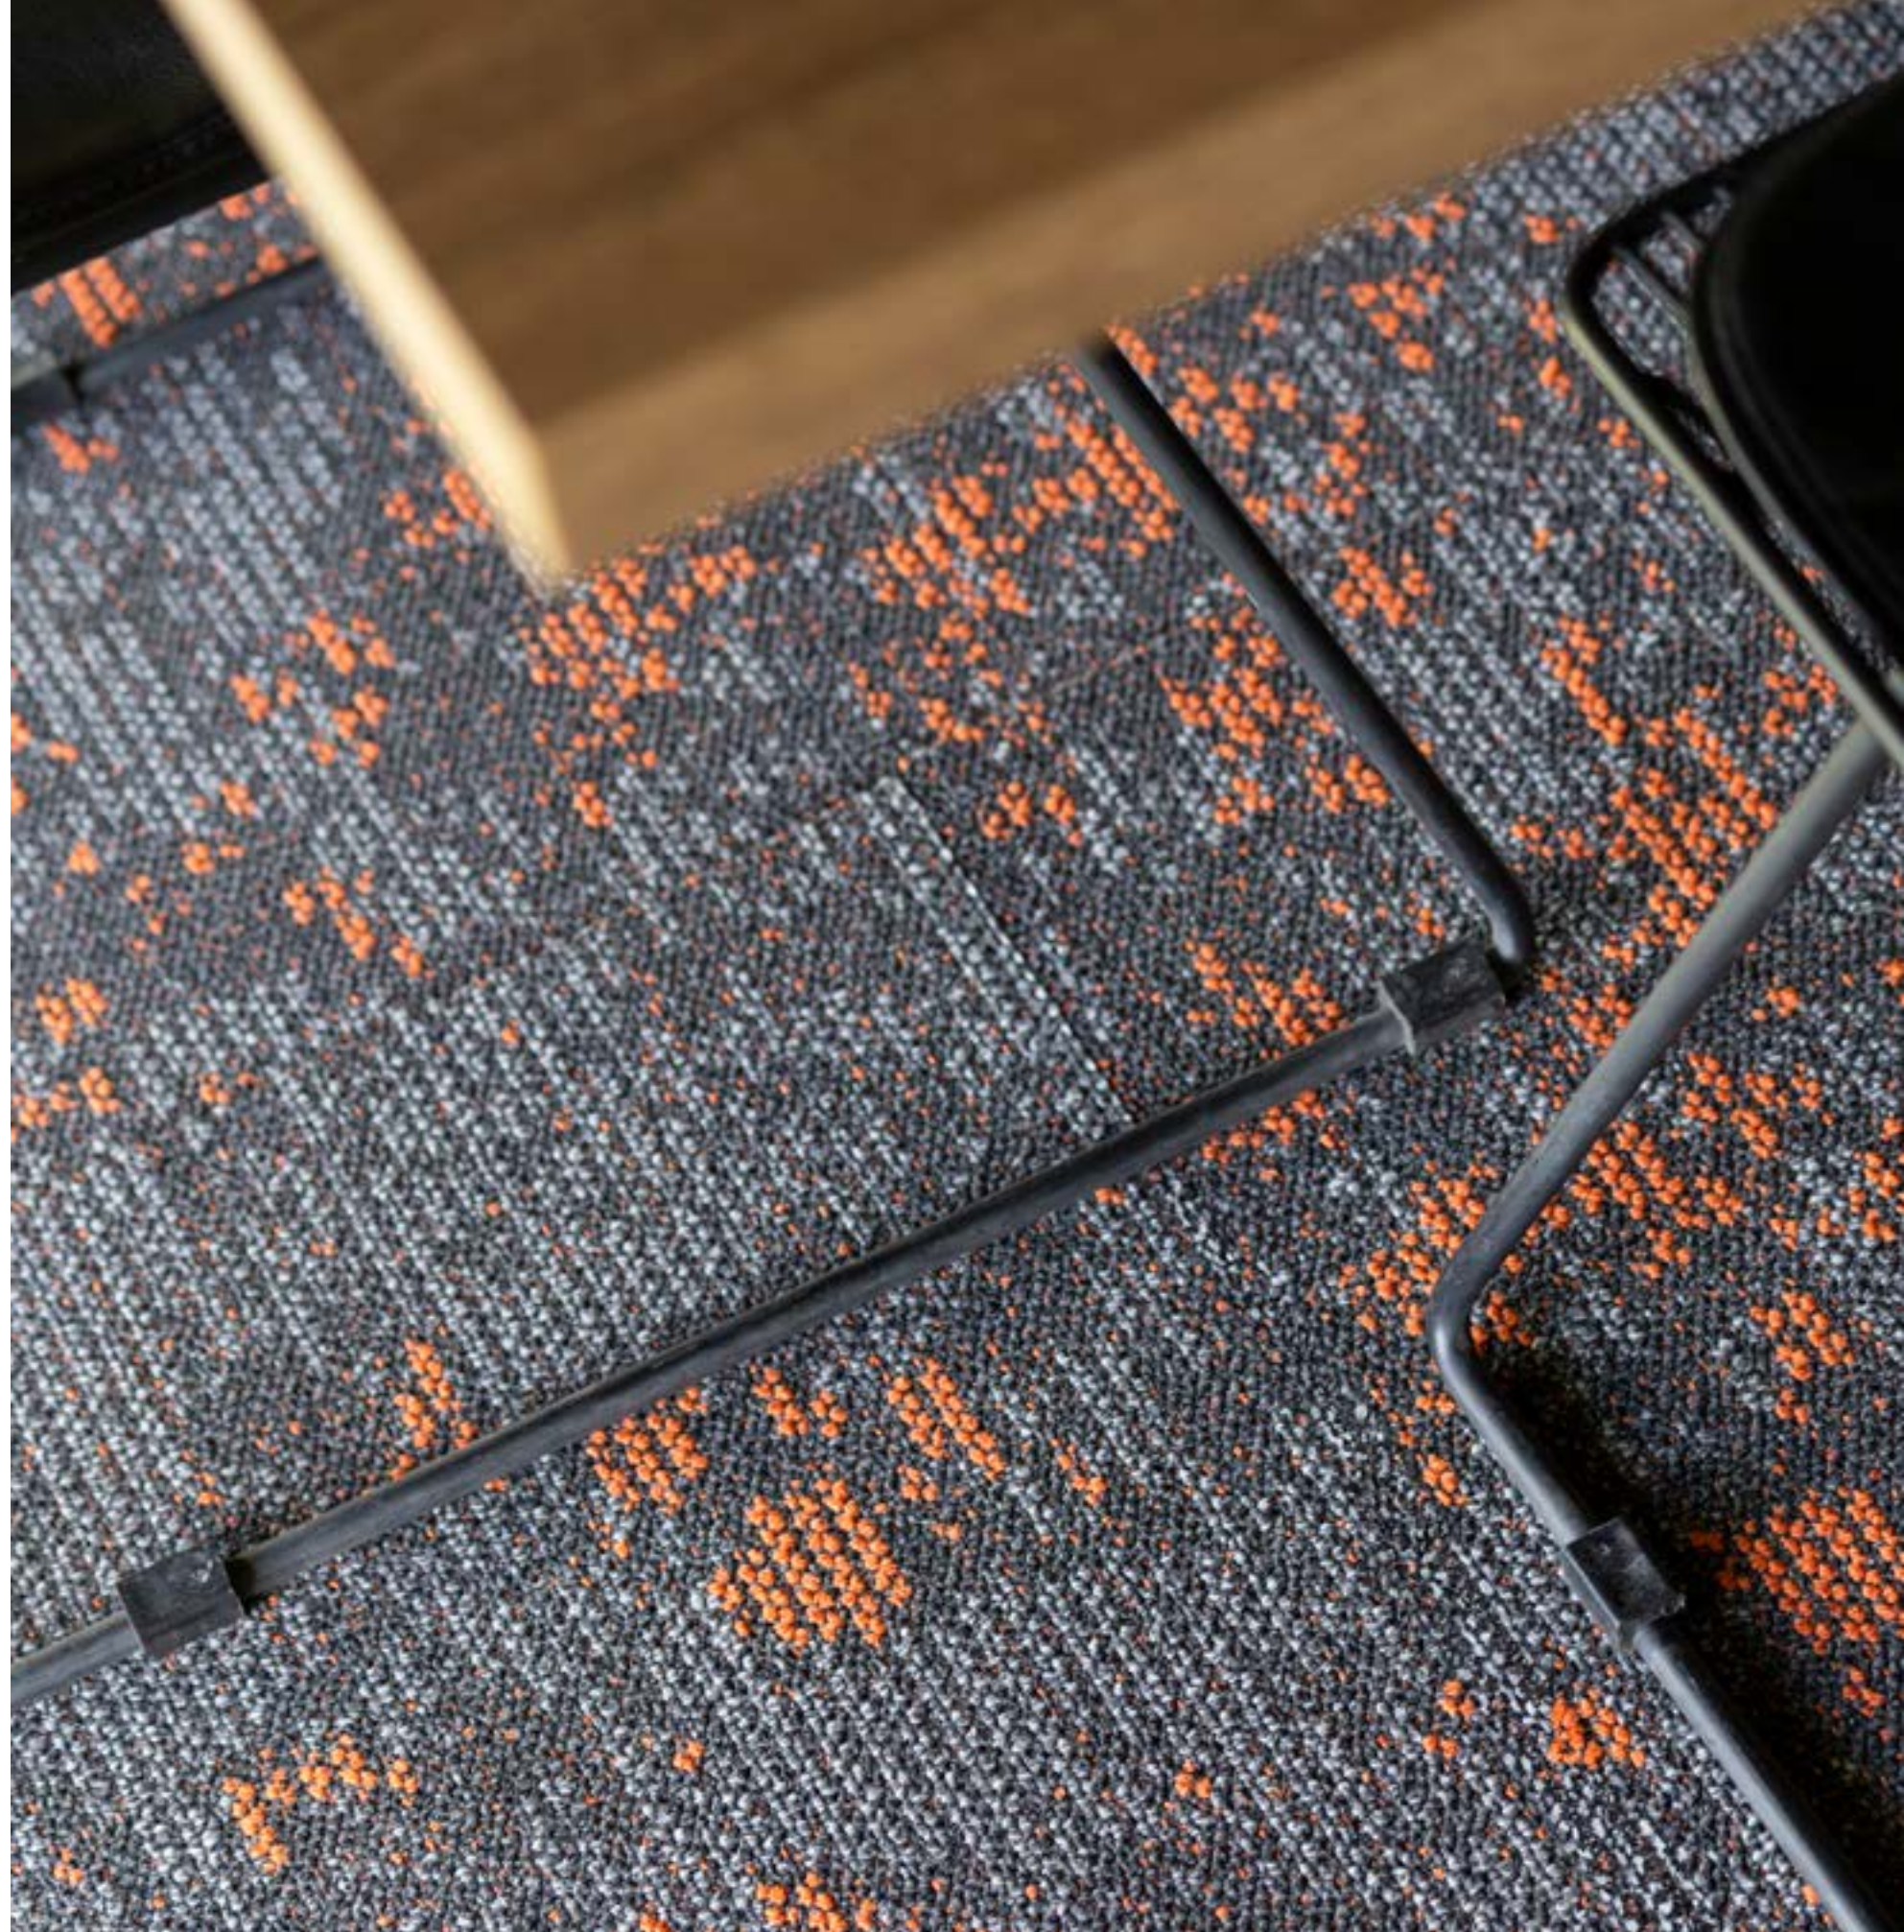



Colors Book Madrid



249673




249633



249671



249622

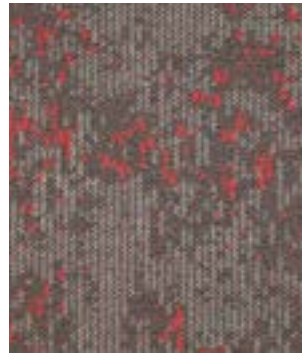

249672



249625



249678



249685



249677




249655



249676



249665

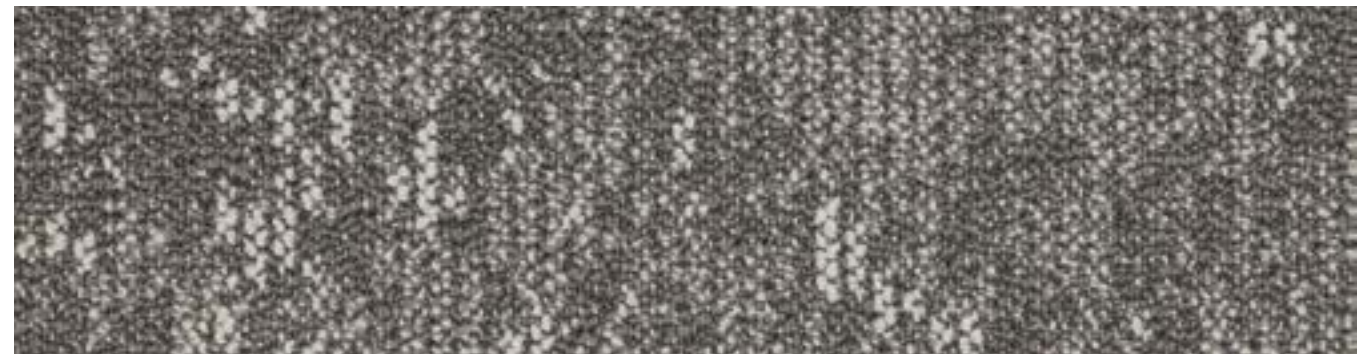

249675

MADRID

RADICI  
CARPET



Specifications and tolerances in according EN 1307

| Costruzione                     | Construction                      | Technique de fabrication       | Herstellungsverfahren             |
|---------------------------------|-----------------------------------|--------------------------------|-----------------------------------|
| Tufting Riccio- Scroll<br>1/10" | Tufted Loop Pile -Scroll<br>1/10" | Tufted Bouclé -Scroll<br>1/10" | Getufted Schlinge-Scroll<br>1/10" |
| Composizione                    | Composition                       | Composition                    | Polnutschicht                     |
| 100% Poliammide SD              | 100% Polyamide SD                 | 100% Polyamide SD              | 100% Polyamid SD                  |
| Sottofondo                      | Secondary Backing                 | Dossier                        | Rückenausrüstung                  |
| Polyflex                        | Polyflex                          | Polyflex                       | Polyflex                          |
| Punti al m²                     | Stitches per m²                   | Touffes au m²                  | Knoten m²                         |
| ± 213300                        | ± 213300                          | ± 213300                       | ± 213300                          |
| Altezza pelo                    | Pile Height                       | Hauteur du velours             | Polhöhe                           |
| ± 2.9 mm                        | ± 2.9 mm                          | ± 2.9 mm                       | ± 2.9 mm                          |
| Altezza totale                  | Total Height                      | Hauteur totale                 | Gesamthöhe                        |
| ± 6.2 mm                        | ± 6.2 mm                          | ± 6.2 mm                       | ± 6.2 mm                          |
| Peso fibra                      | Yarn Weight                       | Poids du velours               | Polgewicht                        |
| ± 650 g/m²                      | ± 650 g/m²                        | ± 650 g/m²                     | ± 650 g/m²                        |
| Peso totale                     | Total Weight                      | Poids total                    | Gesamtgewicht                     |
| ± 4200 g/m²                     | ± 4200 g/m²                       | ± 4200 g/m²                    | ± 4200 g/m²                       |
| Dimensioni quadrotta            | Tile Size                         | Tailles des dalles             | Gesamtgewicht                     |
| 50x50 cm                        | 50x50 cm                          | 50x50 cm                       | 50x50 cm                          |
| MADRID                          | MADRID                            | MADRID                         | MADRID                            |



BUSINESS WEARABILITY: ★ ★ ★

|                             |       |                              |        |
|-----------------------------|-------|------------------------------|--------|
| Colour fastness to light    | > 5   | Thermal resistance m² K/W    | ≤ 0,17 |
| Insulation impact noise ΔLw | 24 dB | Body voltage walking test kV | ≤ 2    |





# Lisboa



TILES 50X50 CM, SOLUTION DYED  
LOUNGE COLLECTION  
AVAILABLE IN 4 COLORS





Colors Book Lisboa



196672



246696



246641



196678

LISBOA



 EN14041



Specifications and tolerances in according EN 1307

| Costruzione          | Construction           | Technique de fabrication | Herstellungsverfahren   |
|----------------------|------------------------|--------------------------|-------------------------|
| Tufting Riccio 1/10" | Tufted Loop Pile 1/10" | Tufted Bouclé 1/10"      | Getufted Schlinge 1/10" |
| Composizione         | Composition            | Composition              | Polnutschicht           |
| 100% Poliammide SD   | 100% Polyamide SD      | 100% Polyamide SD        | 100% Polyamid SD        |
| Sottofondo           | Secondary Backing      | Dossier                  | Rückenausrüstung        |
| Polyflex             | Polyflex               | Polyflex                 | Polyflex                |
| Punti al m²          | Stitches per m²        | Touffes au m²            | Knoten m²               |
| ± 189600             | ± 189600               | ± 189600                 | ± 189600                |
| Altezza pelo         | Pile Height            | Hauteur du velours       | Polhöhe                 |
| ± 3.0 mm             | ± 3.0 mm               | ± 3.0 mm                 | ± 3.0 mm                |
| Altezza totale       | Total Height           | Hauteur totale           | Gesamthöhe              |
| ± 5.6 mm             | ± 5.6 mm               | ± 5.6 mm                 | ± 5.6 mm                |
| Peso fibra           | Yarn Weight            | Poids du velours         | Polgewicht              |
| ± 740 g/m²           | ± 740 g/m²             | ± 740 g/m²               | ± 740 g/m²              |
| Peso totale          | Total Weight           | Poids total              | Gesamtgewicht           |
| ± 4200 g/m²          | ± 4200 g/m²            | ± 4200 g/m²              | ± 4200 g/m²             |
| Dimensioni quadrotta | Tile Size              | Tailles des dalle        | Gesamtgewicht           |
| 50x50 cm             | 50x50 cm               | 50x50 cm                 | 50x50 cm                |
| Famiglia Tufting 26  | Famiglia Tufting 26    | Famiglia Tufting 26      | Famiglia Tufting 26     |



Business Wearability: ★ ★ ★

|                             |       |                              |        |
|-----------------------------|-------|------------------------------|--------|
| Colour fastness to light    | > 5   | Thermal resistance m² K/W    | ≤ 0,17 |
| Insulation impact noise ΔLw | 24 dB | Body voltage walking test kV | ≤ 2    |





# Barcelona



TILES 50X50 CM, SOLUTION DYED  
LOUNGE COLLECTION  
AVAILABLE IN 15 COLORS





Colors Book Barcelona



BARCELONA

 EN14041



Specifications and tolerances in according EN 1307

| Costruzione          | Construction           | Technique de fabrication | Herstellungsverfahren   |
|----------------------|------------------------|--------------------------|-------------------------|
| Tufting Riccio 1/10" | Tufted Loop Pile 1/10" | Tufted Bouclé 1/10"      | Getufted Schlinge 1/10" |
| Composizione         | Composition            | Composition              | Polnutschicht           |
| 100% Poliammide SD   | 100% Polyamide SD      | 100% Polyamide SD        | 100% Polyamid SD        |
| Sottofondo           | Secondary Backing      | Dossier                  | Rückenausrüstung        |
| Polyflex             | Polyflex               | Polyflex                 | Polyflex                |
| Punti al m²          | Stitches per m²        | Touffes au m²            | Knoten m²               |
| ± 189600             | ± 189600               | ± 189600                 | ± 189600                |
| Altezza pelo         | Pile Height            | Hauteur du velours       | Polhöhe                 |
| ± 3.0 mm             | ± 3.0 mm               | ± 3.0 mm                 | ± 3.0 mm                |
| Altezza totale       | Total Height           | Hauteur totale           | Gesamthöhe              |
| ± 5.6 mm             | ± 5.6 mm               | ± 5.6 mm                 | ± 5.6 mm                |
| Peso fibra           | Yarn Weight            | Poids du velours         | Polgewicht              |
| ± 740 g/m²           | ± 740 g/m²             | ± 740 g/m²               | ± 740 g/m²              |
| Peso totale          | Total Weight           | Poids total              | Gesamtgewicht           |
| ± 4200 g/m²          | ± 4200 g/m²            | ± 4200 g/m²              | ± 4200 g/m²             |
| Dimensioni quadrotta | Tile Size              | Tailles des dalle        | Gesamtgewicht           |
| 50x50 cm             | 50x50 cm               | 50x50 cm                 | 50x50 cm                |
| Famiglia Tufting 26  | Famiglia Tufting 26    | Famiglia Tufting 26      | Famiglia Tufting 26     |



BUSINESS WEARABILITY: ★ ★ ★

|                             |       |                              |        |
|-----------------------------|-------|------------------------------|--------|
| Colour fastness to light    | > 5   | Thermal resistance m² K/W    | ≤ 0,17 |
| Insulation impact noise ΔLw | 24 dB | Body voltage walking test kV | ≤ 2    |



# Tiles

## Collection

**RADICI PIETRO INDUSTRIES & BRANDS S.p.A.**

Via Cav. Pietro Radici, 19  
24026 Cazzano S. Andrea (BG) - Italy  
Tel. +39 035 724242 - Fax +39 035 741549  
info@radicicarpet.it - www.radicicarpet.it







**RADICI PIETRO INDUSTRIES & BRANDS S.p.A.**

**Via Cav. Pietro Radici, 19  
24026 Cazzano S. Andrea (BG) - Italy  
Tel. +39 035 724242 - Fax +39 035 741549  
info@radicicarpet.it - www.radicicarpet.it**